HATSAN AIRCGUNS

HATSAN FACTOR SNIPER

(0)

HAMMER

COLUMN CO

(3)

GUITER



THE HATSAN DIFFERENCE

More Power

Even though velocity rates may appear the same from brand to brand, in most instances that is not the case. Hzatsan establishes its velocity rating using heavier lead pellets, while most competitors use lighter aluminum pellets to market their velocities. What this means for you is that a Hatsan airgun delivers **OVER 30% MORE IMPACT ENERGY** than an alloy-tested airgun with the same velocity.



Unique Features

Many of our airguns offer specialty features that come standard within our product line to provide shooters with a better experience, including the Quattro Trigger, SAS-Shock Absorber System, QuietEnergy, XRS – Recoil Reduction System, Barrel Release System, TruGlo® fiber optics, the Triopad® butt system, patented "Antidouble pellet feed mechanism" preventing more than one pellet loading into barrel and "anti-knock system" preventing gas wastage when rifle is knocked or bounced.

What sets Hatsan Airguns apart from The Competition?



100% Vertically Integrated

Complete vertical integration ensures the high quality you expect from Hatsan. Every part of every airgun is produced right in our facilities to guarantee a wellmade finished product. And only the highest-grade raw materials are used, including fine Turkish walnut and durable German steel.



It all started in 1976 with one young man hoping to replicate an air dart gun in his parents' garage. Since that time, Hatsan has become one of the world's most recognized brands in the shooting sports, airgun and firearm industry – delivering its products to more than 95 countries. This family owned and operated manufacturer maintains a hands - on approach - producing all designs and components in - house to ensure that each product deserves to bear the Hatsan name. In fact, the original founder is still very involved in new product development and design.

> Serious. Solid. Impact. www.hatsan.com.tr





72 joules POWER!

Full-Auto and Semi-Auto firing mode precharged pnuematic (PCP) air rifle. Selectable firing mode switch. Patented efficient airoperated system.

Mar Pressure 250 km The Det all Court

- . .

Elevation and fit angle & adjustable rubber butt pad. Tactical style ambidextrous stock with thumbhole Elevation adjustable cheek rest. Elevation & windage adjustable fiber optic rear sight built into the carry handle.

Select Fire Switch. Choose between Semi & Full Auto.





21-shot magazine in .22 (5.5mm), 19-shot magazine in .25 (6.35mm) and 16-shot magazine in .30 (7.62mm) caliber

BLITZ



FULL AUTO & SemiAutoAction





FULL AUTO & SemiAutoAction

Model		Blitz			
Caliber		5.5mm / .22cal 6.35mm / .25cal 7.62mm / .30			
Max. Muzz	le Velocity (*)	320m/s(1050fps)	295m/s(970fps)	221m/s(730fps)	
Energy (*)	Joules	49	56	71.8	
chergy (*)	ft.lbsv	36	41	53	
Magazine Capacity		21	19	16	
Air Tube V	olume	580cc			
Fill Pressu	re		250 BAR		
Number of Semi Auto or Full Auto Shots at Optimal Velocity		130	110	100	
Stock	Tactical Synthetic Stock. Ergonomic Pistol Grip Elevation adjustable Cheek-Rest.				
Overall Ler	ngth	1150mm (45.2")			
Barrel Lenç	jth	585mm (23")			
Weight			4kg (8.8lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
** Minimum 100 bar pressure necessary for full auto or semi auto action.

Adjustable rear sight built into the carrying handle & adjustable front sight.





250 BAR **Fill Pressure** Number of Shots at Optimal Velocity 130 110 140 100 Stock Bullpup, advanced polymer, elevation adjustable comb, adjustable but pad **Overall Length** 905mm (35.6") **Barrel Length** 585mm (23") Weight 4kg (8.8lbs)

Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors, ** Minimum 100 bar pressure necessary for full auto or semi auto action.



1155fps**POWER!** with Lead Pellets **BLITZ MEVZI** Full-Auto II; III; IV **FULLY SHROUDED**



FULL AUTO & SemiAutoAction

MEVZI IV

Model		Hatsan Blitz Mevzi 4				
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm/ ,30 cal	
Max. Muz	zle Velocity (*)	350m/s(1155fps)	320m/s(1050fps)	295m/s(970fps)	221m/s(730fps)	
Energy	Joules	34,7	49	56	71,8	
(*)	ft.lbs	25,5	36	41	53	
Magazine	Capacity	24	21	19	16	
Air Tube \	Air Tube Volume 580cc x 4 pcs (carbon fiber)			•		
Fill Press	ure		250	BAR		
Number o Optimal V	f Shots at elocity	500	480	400	360	
Stock	Stock Tactical Synthetic Stock, Ergonomic Pistol Grip. Adjustable Cheek Piece.			rip.		
Overall Le	ength	905mm (35.6")				
Barrel Le	ngth	585mm (23")				
Weight			6.15 kg (*	13.5 lbs)		

FULL AUTO & SemiAutoAction

Full-Auto and Semi-Auto firing mode precharged pnuematic (PCP) air rifle. Selectable firing mode switch. Patented efficient airoperated system. 580cc carbon fiber air bottle mounted in the forearm. BLITZ MEVZİ II Comes with two 580 cc carbom fiber air bottle. BLITZ MEVZİ III Comes with three 580 cc carbom fiber air bottle. BLITZ MEVZİ IV Comes with four 580 cc carbom fiber air bottle. Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.

FULL AUTO & SemiAutoAction



Model		Hatsan Blitz Mevzi 2				
Caliber	4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25cal 7.62m			7.62mm/ ,30 cal		
Max. Muzzle Velocity (*)	350m/s(1155fps)	320m/s(1050fps)	295m/s(970fps)	221m/s(730fps)		
Energy Joules	34,7	49	56	71,8		
(*) ft.lbs	25,5	36	41	53		
Magazine Capacity	24	21	19	16		
Air Tube Volume		580cc x 2 pcs (carbon fiber)				
Fill Pressure		250 E	BAR			
Number of Shots at Optimal Velocity	265	250	210	190		
Stock	Tact	Tactical Synthetic Stock, Ergonomic Pistol Grip. Adjustable Cheek Piece.				
Overall Length	905mm (35.6")					
Barrel Length	585mm (23")					
Weight	4.7 kg (10.4 lbs)					



	Hatsan Blitz Mevzi 3					
4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm/ ,30 cal			
350m/s(1155fps)	320m/s(1050fps)	295m/s(970fps)	221m/s(730fps)			
34,7	49	56	71,8			
25,5	36	41	53			
24	21	19	16			
	580cc x 3 pcs (carbon fiber)					
	250 B	AR				
375	375 360 300 270					
Tacti	Tactical Synthetic Stock, Ergonomic Pistol Grip. Adjustable Cheek Piece.					
905mm (35.6")						
	585mm (23")					
	5.4 kg (11	.9 lbs)				

^{*} Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
^{**} Minimum 100 bar pressure necessary for full auto or semi auto action.



SemiAutoAction

1020 fps POWER! with Lead Pellets GALATIAN **5 AUTO**


Semi Auto FULLY SHROUDED

BARREL

Semi auto action, pre-charged pneumatic (PCP) air rifle. Checkering on grip & forend for better control & feel. Detachable aluminum air cylinder tube (255cc). Spare cylinders are available. Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced. Gold plated metal trigger & synthetic trigger guard.

(*) Scope sold separately

Sights are easily detachable which allows to mount optics on the receiver.

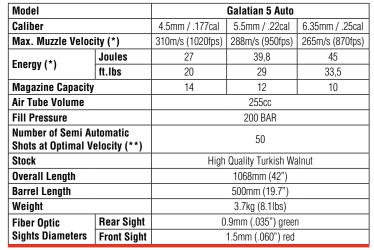

Carrying case included.

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.





Semi auto action, pre-charged pneumatic (PCP) air rifle. Detachable aluminum air cylinder tube (255cc). Spare cylinders are available. Includes quick-fill nozzle & air cylinder discharging cap. Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced. Black metal trigger & synthetic trigger guard.



SemiAutoAction



Model			Galatian 6 Auto	
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velo	city (*)	310m/s (1020fps)	288m/s (950fps)	265m/s (870fps)
Eporgy (*)	Joules	27	39,8	45
Energy (*)	ft.lbs	20	29	33,5
Magazine Capacity	/	14	12	10
Air Tube Volume	ir Tube Volume 255cc			
Fill Pressure			200 BAR	
Number of Semi Automatic Shots at Optimal Velocity			50	
Stock			Advanced Polymer	
Overall Length		1068mm (42")		
Barrel Length		500mm (19.7")		
Weight 3.85kg (8,51b		3.85kg (8,5lbs)		
Fiber Optic	Rear Sight	0.9mm (.035") green		
Sights Diameters	Front Sight	-	1.5mm (.060") red	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
 ** Minimum 100 bar pressure necessary for semi auto action.

- Telescopic stock. Can be shortened / extended by 10cm (4").
- Stock can be removed easily and you can use it with pistol grip only.
- Elevation adjustable comb.









Carrying case included.

Semi auto action, pre-charged pneumatic (PCP) air rifle. 500cc volume air bottle mounted in the forearm. Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.

Model			Barrage	
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Veloc	ity (*)	320m/s (1050fps)	295m/s (970fps)	270m/s (900fps)
Eporav (*)	Joules	27	42	48,5
Energy (*)	ft.lbs	21	31	36
Magazine Capacity	1	14	12	10
Air Tube Volume		500cc		
Fill Pressure			250 BAR	
Number of Semi A Shots at Optimal V		100 120 120		
Stock		Advanced polymer, thumbhole, elevation adjustable comb, adjustable but pad		
Overall Length	ll Length 1040mm (40.9")			
Barrel Length		500mm (19.7")		
Weight		4	.62kg (10.1lbs)	
Fiber Optic	Rear Sight	0.9	mm (.035") gre	en
Sights Diameters	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.












SemiAutoAction

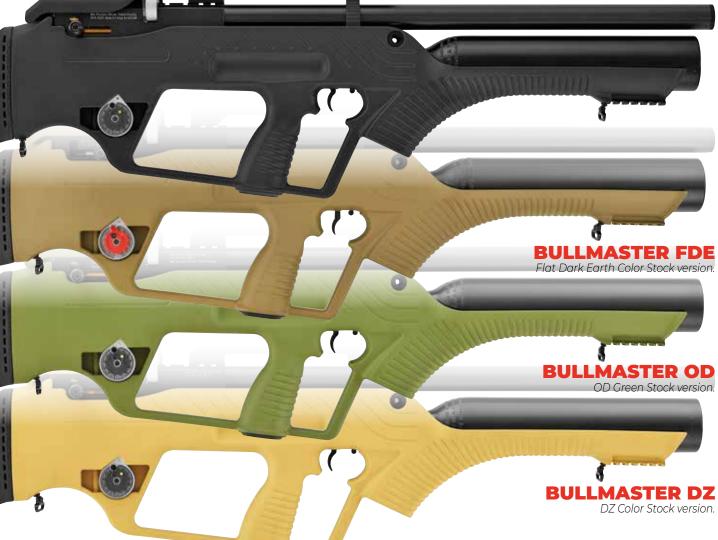

Genuine bullpup design, Semi auto action pre-charged pneumatic (PCP) air rifle. 500cc volume air bottle mounted in the forearm.Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.

Model			BullMaster	
Caliber		4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25ca		
Max. Muzzle	/elocity (*)	320m/s (1050fps)	295 m/s (970 fps)	270m/s (900fps)
Energy (*)	Joules	27	42	48,5
cheryy ()	ft.lbs	21	31	36
Magazine Cap	acity	14	12	10
Air Tube Volu	me	500+30cc 500+30cc 500+30cc		
Fill Pressure		250 BAR	250 BAR	200 BAR
Number of Se Shots at Optin	mi Automatic nal Velocity (**)	100	120	120
Stock Bullpup, advanced polymer, thumbhole, elevation adjustable combo, adjustable but p			'	
Overall Lengt	h	785mm (30.9")		
Barrel Length	Barrel Length 500mm (19.7")			
Weight			4.7kg (10.3lbs)	

BARREL

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.



Model		Invader Auto		
Caliber		4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25cal		
Max. Muzzl	e Velocity (*)	310m/s (1020fps)	288m/s (950fps)	265m/s (870fps)
Energy (*)	Joules	27	39,8	45
cheryy ()	ft.lbs	20	29	33.5
Magazine Capacity		14	12	10
Air Tube Vo	lume	255cc		
Fill Pressur	e	200 BAR		
Number of Semi Automatic Shots at Optimal Velocity		50	50	50
Stock		Tactical Synthetic Stock Ergonomic Pistol Grip Adjustable Cheek Rest		
Overall Len	gth	1030 mm (40.5")		
Barrel Leng	th	500mm (19.7")		
Weight		3.7kg (8.2lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
** Minimum 100 bar pressure necessary for semi auto action.



Tactical	cida	folding	ctock ic	included.
rucucur	side	loiuiiig	SLUCK IS	inciudea.

Semi auto action, pre-charged pneumatic (PCP) air rifle. 62cc volume air bottle mounted in the forearm. Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced. Black metal trigger.

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.

28

36

Ergonomic design synthetic grip with checkering

Collapsible and removablee butt

460mm (18.1")

635mm (25")

200mm (7.9")

2.16kg (4.7lbs)

0.9mm (.035") green

1.5mm (.060") red

30

Rear Sight

Front Sight

Butt Folded

Butt Extend-

ed

Shots at Optimal Velocity (**)

Stock

Overall Length

Barrel Length

Fiber Optic

Sights Diam-

Weight

eters



Butt-pad height adjustment (up & down): 35mm (1.38") 6-position telescopic stock and conveniently adjustable integrated cheek rest for both cheek riser height and length-of-pull rest. (up & down); 45mm (1.79")- (back) : 40mm (1.59")

> Ergonomic and reversible cocking lever for ambidextrous operation

Combo scope rail; (11mm and 22mm)

Externally adjustable hammer preload

QUATTRO

100cc pre-airchamber

Manual safety button

Butt-pad tilt adjustment

> Ergonomic soft rubber pistol grip

QD sling swivel

2-Stage fully adjustable Quattro Trigger

Rubber butt-pad offers positive shoulder purchase to prevent slippage for optimal accuracy.

Adjustable length of pull; 40mm (1.59")

14





(*) Velocity and Energy levels are stable shots at 140 bar regulator pressure.



(*) Velocity and Energy levels are stable shots at 140 bar regulator pressure.







Model		Hatsan Factor			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzz	e Velocity (*)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)	
F morent (*)	Joules	36	51	57	
Energy (*)	ft.lbs	27	38	42	
Magazine (Capacity	24	21	19	
Air Tube Vo	olume	500cc (aluminum)			
Fill Pressu	re	250 BAR			
Number of	Shots Per Fill	320	310	300	
Number of Shots at Optimal Velocity		105	100	90	
Stock		Telescopic stock. Elevation adjustable cheek rest. Pistol grip.			
Overall Ler	igth	1025mm (40.3") Stock Shortened 1090mm (42.9") Stock Extended			
Barrel Lenç	jth	585mm (23")			
Weight			3.6kg (7.9lbs)		

Manual loading, side lever action, precharged pneumatic (PCP) air rifle. Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber. 3 power adjustable Transfer Port. Externally adjustable hammer preload. QuietEnergy fully shrouded barrel and Integrated Sound Moderator -Approximately 50% Quieter. 1/2" UNF threaded muzzle for additional detachable sound moderators.

Power Setting	Hatsan Factor Recommended Energy* 4.5mm / .177cal
3	20 to 36 Joule
2	11 to 30.5 Joule
1	9.4 to 18.8 Joule
Power Setting	Hatsan Factor Recommended Energy* 5.5mm / .22cal

3	35.8 to 51 Joule
2	28 to 39 Joule
1	19 to 22.9 Joule

Power Setting	Hatsan Factor Recommended Energy* 6.35mm / .22cal
3	38 to 57 Joule
2	30.5 to 41.5 Joule
1	18 to 21.5 Joule

66.

* Energy Range "Min to Max" Hammer Preload. ** Energy Range with "Min to Max" Hammer Preload.

(*) Scope sold separately

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors



500cc volume detachable aluminum air bottle.

Spare aluminum air bottles are available.

580cc carbon fiber air bottle upgrade available. .



Model		Hatsan Factor-RC				
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle V	/elocity (*)	306m/s (1010fps)	288m/s (950fps)	265m/s (870fps)		
Energy (*)	Joules	26.5	40	45.3		
Lileiyy ()	ft.lbs	19.5	29.5	33.5		
Magazine Cap	acity	24	21	19		
Air Tube Volu	ne	580cc (carbon fiber)				
Fill Pressure		250 BAR				
Number of Sho Optimal Veloc		140	130	120		
Stock		Telescopic stock	with adjustable com	b and pistol grip		
Overall Length		1025mm (40.3") Stock Shortened 1090mm (42.9") Stock Extended				
Barrel Length		585mm (23")				
Weight		3.6kg (7.9lbs)				
REGULATOR		EXTERNALLY ADJUSTABLE				

Regulator and Carbon Fiber air bottle version. Manual loading, side lever action, precharged pneumatic (PCP) air rifle. Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber. 3 power adjustable Transfer Port. Externally adjustable hammer preload. Externally adjustable Regulator.

Pressure adjustable

Power Setting	Hatsan Factor-RC Recommended Energy^^ 4.5mm / .177cal
3	19 to 26.5 Joule
2	18 to 23 Joule
1	12 to 14.5 Joule
Power Setting	Hatsan Factor-RC Recommended Energy** 5.5mm / .22cal
3	25 to 40 Joule
2	20 to 28 Joule
1	12.4 to 16 Joule
Power	Hatsan Factor-RC Recommended Energy**

Setting	6.35mm / .22cai
3	27 to 45,3 Joule
2	23 to 31 Joule
1	12.6 to 15.6 Joule

* Velocity and Energy levels are stable shots at 140bar regulator pressure

* Energy Range "Min to Max" Hammer Preload ** Energy Range with "Min to Max" Hammer Preload and Regulator at 140 BAR.



Pressure adjustable Regulator and 580cc volume detachable carbon fiber air bottle. Spare carbon air bottles are available. 3 power adjustable Transfer Port. Externally adjustable hammer preload. 1/2" UNF threaded muzzle for additional detachable sound moderators. Built-in pressure gauge to monitor the cylinder pressure Additional air gauge to monitor the regulator pressure. Finger distande to the trigger shoe cam be adjusted by 15 mm. Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load. Vertical and horizontal trigger shoe adjustment. Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.

Model		Hatsan Factor BP				
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzl (*)	e Velocity	333m/s (1100fps)	324m/s (1070fps)	294m/s (970fps)		
Enoray (*)	Joules	31,5	50,5	56,4		
Energy (*)	ft.lbs	23,2	37,25	41,6		
Magazine Capacity 24 21				19		
Air Tube Vo	lume	580cc (carbon fiber)				
Fill Pressur	e		250 BAR			
Number of S Optimal Ve		70 60 50				
Stock						
Overall Len	gth	870mm(34.25")				
Barrel Leng	th	585mm (23")				
Weight		3.8kg (8.38 lbs)				
Regulator		Externally Adjustable				

* Velocity and Energy levels are stable shots at 150bar regulator pressure.

Power Setting	Hatsan Factor-BP Recommended Energy**		
•••••••	4,5mm / .177 cal		
3	31,5 to 25 Joule		
2	25 to 21 Joule		
1	14,6 to 16,6 Joule		
Power Hatsan Factor-BP Recommen Setting Energy**			
j	5,5mm / .22cal		
3	41,5 to 50,5 Joule		
2	31 to 35 Joule		
1	17,5 to 20,4 Joule		
Power Setting	Hatsan Factor-BP Recommended Energy**		
	6.35mm / .25cal		
3	41,3 to 56,4 Joule		
2	33 to 38 Joule		
1	21,5 to 24 Joule		

* Energy Range "Min to Max" Hammer Preload. ** Energy Range with "Min to Max" Hammer Preload and Regulator at 150 BAR. Pistol Grip can be set to different locations for small; medium or big fingers. Finger distance to the trigger shoe can be adjusted by 15 mm.




970 fps**POWER!** with Lead Pellets





23

FACTOR FT

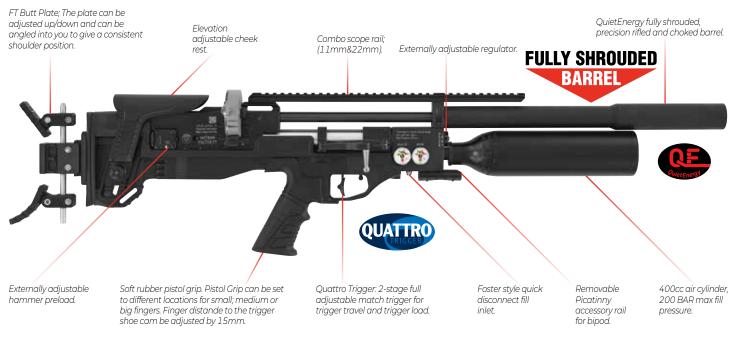

Model		Hatsan Factor FT				
Caliber		4.5mm / .177cal	4.5mm / .177cal 5.5mm / .22cal 6.35mm /			
Max. Muzzle Velocity (*)		294m/s (970fps)	275m/s (910fps)	252m/s (830fps)		
Energy (*)	Joules	24,5	36,5	41		
Elleryy ()	ft.lbs	18	27	30,5		
Magazine Ca	pacity	24	21	19		
Air Tube Volu	ıme	400cc				
Fill Pressure		200 BAR				
Number of Sl Optimal Velo		60 60 60				
Stock		FT Butt Plate and Pistol Grip				
Overall Leng	th	920mm (36.2")				
Barrel Lengt	n	450mm (17,7")				
Weight		3.75kg (8.33 lbs)				
Regulator		EXTERNALLY ADJUSTABLE				

Power Setting	Hatsan Factor FT Recommended Energy** 4.5mm / .177cal
3	14,6-28,7 joule
2	11,7-20,1 joule
1	7,9-11,3 joule

Power Setting	Hatsan Factor FT Recommended Energy** 5.5mm / .22cal					
3	20,4-36,5 joule					
2	16,4-26,8 joule					
1	10,2-15,4 joule					

Power Setting	Hatsan Factor FT Recommended Energy** 6.35mm / .25cal				
3	23,8-41,3 joule				
2	13,8-27,7 joule				
1	8,2-13,2 joule				

(*) Velocity and Energy levels are stable shots at 125 bar regulator pressure. * Energy Range "Min to Max" Hammer Preload

** Energy Range with "Min to Max" Hammer Proload and Regulator at 140 BAR





Manual loading, side-lever action, pre-charged pneumatic (PCP) air rifle. Precision rifled choked barrel for accuracy. 2 air tube bottles of each 500cc. Overall blued finish, black anodized receiver. "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel. 2-stage adjustable trigger for trigger travel and trigger load. Black metal trigger.

Model				Hero	ules			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal	9mm / .35cal	11.43mm / .45cal	
Max. Muzzle Velocity (*)		396m/s (1300fps)	375m/s (1230fps)	365m/s (1200fps)	300m/s (990fps)	271m/s (890fps)	224m/s (741fps)	
Enormy (*)	Joules	44	67	87	132	193	396	
Energy (*)	ft.lbs	32,5	49	64	97	142,5	292	
Magazine (Capacity	17	14	13	10	9	7	
Air Tube Vo	olume			2 x 5	00cc			
Fill Pressu	re			250	BAR			
Number of Fill	Shots Per	140	120	120	85	72	37	
Number of Shots at Optimal Velocity		70	65	62	51	48	15	
Stock			A	dvanced polymer, tactical st	ock with integrated pistol gr	ip		
Overall Ler	ngth	1230mm (48.4")						
Barrel Lenç	yth	585mm (23")						
Weight				5.9kg	(13lbs)			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Model		Hercules Bully					
Caliber		4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25cal 7.62mm / .30cal 9mm / .35cal 11.43mm / .45cal					
Max. Muzzle Vo	elocity (*)	396m/s (1300fps)	375m/s (1230fps)	365m/s (1200fps)	300m/s (990fps)	271m/s (890fps)	224m/s (741fps)
Enormy (*)	Joules	44	67	87	132	193	396
Energy (*)	ft.lbs	32,5	49	64	97	142,5	292
Magazine Capa	city	17	14	13	10	9	7
Air Tube Volum	e			500c	C		
Fill Pressure		250 BAR					
Number of Sho	ts Per Fill	95 85 80 50 45 19					19
Number of Sho	ts at Optimal Velocity	45 40 36 15 13 8					8
Stock			Advanced poly	mer, tactical bullpup	stock with integrate	d pistol grip	
Overall Length				920mm (3	36.2")		
Barrel Length				585mm (23")		
Weight		4.65kg (10.3lbs)					
Fiber Optic	Rear Sight	0.9mm (.035") green					
Sights Diam- eters Front Sight		1.5mm (.060") red					

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.





PILEDRIVER *Big Bore Pcp*







Large loading portloads ammo up to 34mm in length.

Model		PILEDRIVER						
Caliber		6,35mm / .25cal	7.62mm / ,30 cal	9mm / ,35 cal	11,45mm / .45cal	12,7mm / .50cal	15.8mm / .62cal	
Max. Muzzle Velocity (*)		333m/s (1100fps)	318m/s (1050fps)	303m/s (1000fps)	268m/s (885fps)	218m/s (720fps)	213m/s (700fps)	
Energy (*)	Joules	168	266	436	955	1100	955	
cheryy ()	ft.lbs	124	196	322	700	800	700	
Air Tube Volume		480cc (carbon fiber)						
Fill Pressure)	300 BAR						
Number of S	hotsper fill	30	25	15	5	5	4	
Stock		Bullpup Synthetic Stock						
Overall Length		1125mm (44,3")	1190mm (46,5") 1130.3mm					
Barrel Length		750mm (29,5")	") 890mm (35") 838mm (33")					
Weight		4.66kg (10.35lbs)						

(*) Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature elevation as well as other factors.






Pre Charged Pneumatic (PCP), side lever action, multi shot air rifle. Precision rifled barrel for accuracy. Available in .30 (7.62mm) and .35 (9mm) caliber. Detachable aluminum air cylinder tube (255cc). Spare cylinders are available. "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel. Patented Anti-Knock System to prevent gas wastage when rifle is knocked or bounced. Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load. Gold plated metal trigger & metal trigger guard.

Model		BT65SL C	arnivore		
Caliber		7.62mm / .30cal	9mm / .35cal		
Max. Muzz	zle Velocity (*)	278m/s (920fps)	230m/s (760fps)		
Enormy	Joules	114	141		
Energy	ft.lbs	84	104		
Magazine Capacity 7			6		
Air Tube V	olume	255cc			
Fill Pressu	ire	200 BAR			
Shots Per	Fill	55	50		
Number of	f Shots at Optimal Velocity	19	17		
Stock		Advanced Polymer or Walnut, montecarlo cheekpiece, adjustable butt pad & adjustable comb			
Overall Le	ngth	1240mm (48.8")			
Barrel Len	gth	585mm (23")			
Weight		4.20kg (9.3lbs)			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

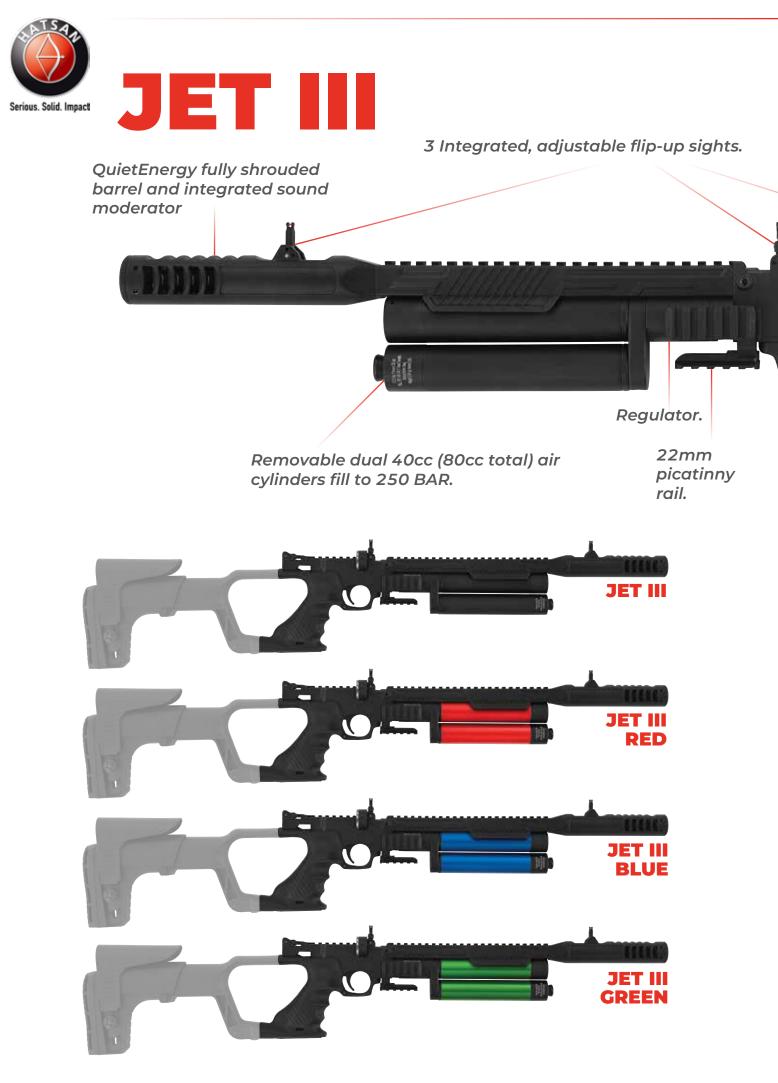








Elevation adjustable cheek rest.



Model			JET III		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Velocity (*)		220m/s (725fps)	200 m/s (660fps)	177m/s (585fps)	
Enoray (*)	Joules	13,7	19	20,5	
Energy (*)	ft.lbs	10		15	
Magazine Ca	pacity	8	7	6	
Air Tube Volu	ime	40+40 cc			
Fill Pressure			250 BAR		
Number of Sl Optimal Velo		31	30	28	
Stock			Advanced polymer		
Overall Leng	th(rifle)	835mm	-790mm (32,9"-31	,1") rifle	
Barrel Length	ı	300mm (11,8")			
Weight		1,9 kg (4,2 lbs)			

(*) Velocity and Energy levels are stable shots at 125 bar regulator pressure

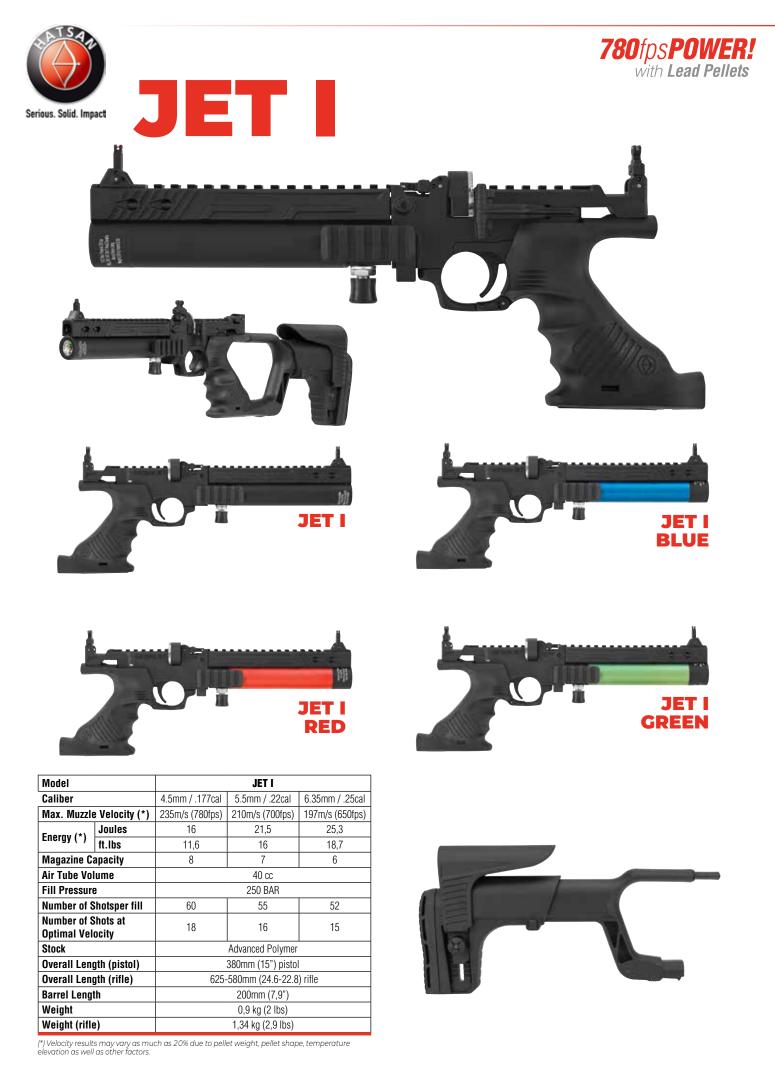

650 fps POWER! with Lead Pellets






Model		JET I RG				
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle Velocity (*)		197m/s (650fps)	182 m/s (600fps)	166m/s (550fps)		
Energy (*)	Joules	11	15,8	18		
chergy ()	ft.lbs	8,1	11,7	13,3		
Magazine C	apacity	8	7	6		
Air Tube Vo	lume	40 cc				
Fill Pressur	e	250 BAR				
Number of S Optimal Vel		21	20	18		
Stock		Advanced polymer				
Overall Len	gth(pistol)	4	155mm (17,9") pisto)l		
Overall Len	gth(rifle)	700-655mm (27,5-25,8) rifle				
Barrel Leng	th	200mm (7,9")				
Weight		1,1 kg (2,4 lbs)				
Weight(rifle	:)	1,54 kg (3,4 lbs)				

(*) Velocity and Energy levels are stable shots at 125 bar regulator pressure.

JET I RG



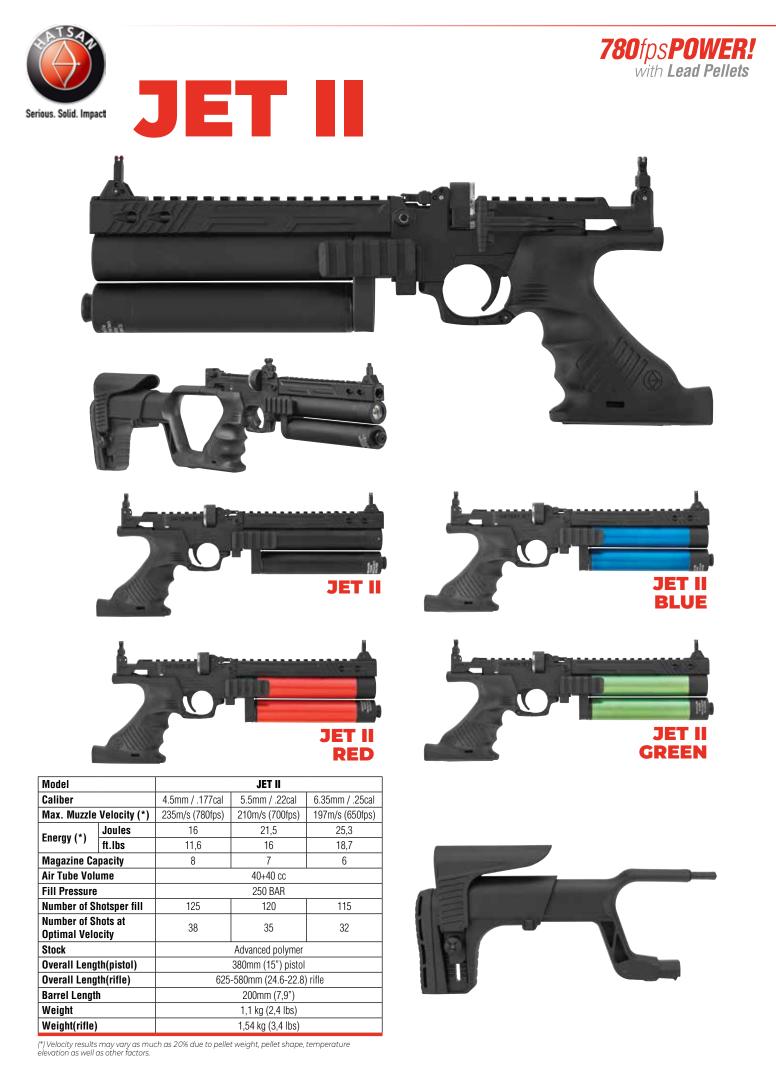





Model			JET II RG		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle	Velocity (*)	197m/s (650fps)	182 m/s (600fps)	166m/s (550fps)	
Energy (*)	Joules	11	15,8	18	
cileigy ()	ft.lbs	8,1	182 m/s (600fps) 166m/s 15,8 1 11,7 1 7 1 40+40 cc 250 BAR 40 3	13,3	
Magazine Ca	apacity	8	7	6	
Air Tube Vol	ume		40+40 cc		
Fill Pressure)		250 BAR		
Number of S		42	40	37	
Optimal Velo	ocity	2۲	-10	51	
Stock			Advanced polymer		
Overall Leng	ıth(pistol)	4	55mm (17,9") pisto	bl	
Overall Leng	ıth(rifle)	700-	655mm (27,5-25,8) rifle	
Barrel Lengt	h		200mm (7,9")		
Weight			1,3 kg (2,9 lbs)		
Weight(rifle)			1,74 kg (3,9 lbs)		

(*) Velocity and Energy levels are stable shots at 125 bar regulator pressure.



Model			Novastar Premiur	n		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muz	zle Velocity (*)	306m/s (1010fps)	288m/s (950fps)	264m/s (870fps)		
Energy	Joules	26.5	40	45.3		
(*)	ft.lbs	19.5	29.5	33.5		
Magazine	Capacity	14	12	10		
Air Tube V	olume	580cc (carbon fiber)				
Fill Pressu	ire	250 BAR				
Number of Optimal V		140	130	120		
Stock		Red or	Blue Laminated Woo	od Stock		
Overall Le	ngth		1120			
Barrel Ler	igth	585mm (23")				
Weight		4.2kg (9.26lbs)				
Regulator		Externally Adjustable				

* Velocity and Energy levels are stable shots at 140bar regulator pressure.

Pressure adjustable Regulator and Carbon Fiber air bottle version. 580cc volume detachable carbon fiber air bottle. Spare carbon air bottles are available. Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle. Laminated Wood stock–Elevation adjustable comb and picantiny rail beneath the forearm. Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced. Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load. Gold plated metal trigger & metal trigger guard.



Ellergy ()	ft.lbs	29	39.5	46	29	39.5	46	
Magazine Ca	Magazine Capacity		12	10	14	12	10	
Air Tube Volu	Air Tube Volume		480cc (carbon fiber)			480cc (carbon fiber)		
Fill Pressure		250 BAR			250 BAR			
Number of SI	Number of Shotsper fill		300	280	320	300	280	
Number of SI	Number of Shots at Optimal Velocity		100	90	110	100	90	
Stock	Stock							
Overall Leng	Overall Length		1095mm			1240mm		
Barrel Length		585mm (23")			585mm (23")			
Weight		3,75kg (8.33lbs)			3,75kg (8.33lbs)			

(*) Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature elevation as well as other factors.



Model			NovaStar			NovaStar QE	
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		370m/s (1220fps)	335m/s (1100fps)	310m/s (1020fps)	370m/s (1220fps)	335m/s (1100fps)	310m/s (1020fps)
Energy	Joules	39	53,5	63	39	53,5	63
(*)	ft.lbs	29	39,5	46	29	39,5	46
Magazine Capacity		14	12	10	14	12	10
Air Tube Volume		480cc			480cc		
Fill Pressu	ure	250 BAR			250 BAR		
Number of	f Shots per fill	320	300	280	320	300	280
Number of	f Shots at Optimal Velocity	110	100	90	110	100	90
Stock		Genuine Turkish High Grade walnut, Thumbhole, Adjustable Cheek Rest. Adjustable Butt Pad.			Genuine Turkish High Grade walnut, Thumbhole, Adjustable Cheek Rest. Adjustable Butt Pad.		
Overall Length		1095mm (43.1")			1240mm (48.8")		
Barrel Length		585mm (23")		585mm (23")			
Weight		3.8kg (8.4lbs)			3.8kg (8.4lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Nova						
4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal				
370m/s (1220fps)	335m/s (1100fps)	310m/s (1020fps)				
39	53,5	63				
29	39,5	46				
10	10	9				
	500cc					
250 BAR						
325	300	280				
150	150 130 115					
Genuine Turki	sh walnut, montecar adjustable butt pad.	lo cheekpiece,				
1245 mm (49")						
585mm (23")						
	4.4 kg (9.7lbs)					
	370m/s (1220fps) 39 29 10 325 325 150	4.5mm / .177cal 5.5mm / .22cal 370m/s (1220fps) 335m/s (1100fps) 39 53,5 29 39,5 10 10 500cc 250 BAR 325 300 150 130 Genuine Turkish walnut, montecar adjustable butt pad. 1245 mm (49") 585mm (23")				

Model			NovaTact			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle V	elocity (*)	370m/s (1220fps)	335 m/s (1100 fps)	310 m/s (1020 fps)		
Energy (*) Joules		39	53,5	63		
Lileigy ()	ft.lbs	29	39,5	46		
Magazine Capa	acity	10	10	9		
Air Tube Volun	ne		500cc			
Fill Pressure			250 BAR			
Number of Sho	Number of Shots Per Fill		300	280		
Number of Sho Optimal Veloci		150 130 115				
Stock		Tactical Telescopic Stock Adjustable Comb Advanced Polymer Grip				
Overall	Butt Shortened	1173mm (46.1")				
Length Butt Extended		1273mm (50.1")				
Barrel Length		585mm (23")				
Weight		4.8kg (10.6lbs)				



Model			Hydra			Hydra QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzl	e Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	
Energy (*)	Joules	30	42	46	30	42	46	
chergy ()	ft.lbs	22	31	34	22	31	34	
Magazine C	apacity	14	12	10	14	12	10	
Air Tube Vo	lume		165cc		165cc			
Fill Pressur	e		200 BAR		200 BAR			
Number of S	Shots per fill	100	95	90	100	95	90	
Number of S	Shots at Optimal Velocity	48	40	38	48	40	38	
Stock		Turkish Walnut. Elev	vation and fit angle a	djustable butt pad.	Turkish Walnut. Ele	evation and fit angle a	adjustable butt pad.	
Overall Len	gth		945 mm (37")			1085mm (42.7")		
Barrel Leng	th		450mm (17.7")			450mm (17.7")		
Weight			2.99 kg (6.6lbs)			3.09 kg (6.8lbs)		



Hydra's patented Versi Cal Technology(VCT) system couples a caliber-specific receiver and barrel into a single interchangeable module. It allows for quick and simple multi caliber interchangeability. Unscrew the convenient upper receiver bolt to switch between .177, .22, or 25 caliber variants. This allows a scope to remain mounted and zeroed with each caliber barrel/receiver module, eliminating the need to re-zero each time the barrel is interchanged. (*Additional caliber-specific barrel/receiver modules are available separately)

Model			HYDRA SYN			HYDRA SYN QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle	Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	
Energy (*)	Joules	30	42	46	30	42	46	
Lilergy()	ft.lbs	22	31	34	22	31	34	
Magazine Ca	ipacity	14	12	10	14	12	10	
Air Tube Vol	ume		215 cc		215 cc			
Fill Pressure)		200 BAR			200 BAR		
Number of S	hotsper fill	145	140	135	145	140	135	
Number of S	hots at Optimal Velocity	55	50	47	55	50	47	
Stock			Advanced polymer			Advanced polymer		
Overall Leng	ıth		940mm (37")		1080mm (42.5")			
Barrel Lengt	h		450mm (17.7")		450mm (17.7")			
Weight			3,17 kg (7.04 lbs)			3,27 kg (7.26 lbs)		



Single shot adapter is included.

Model			Flash			Flash QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzl	e Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	
Energy (*)	Joules	30	42	46	30	42	46	
chergy ()	ft.lbs	22	31	34	22	31	34	
Magazine C	apacity	14	12	10	14	12	10	
Air Tube Vo	lume		165cc		165cc			
Fill Pressu	re		200 BAR		200 BAR			
Number of	Shots per fill	100	95	90	100	95	90	
Number of	Shots at Optimal Velocity	48	40	38	48	40	38	
Stock			Advanced polymer		Advanced Polymer			
Overall Len	gth		915mm (36")		1075mm (42.3")			
Barrel Leng	jth		450mm (17,7")			450mm (17,7")		
Weigh			2.5kg (5.5lbs)			2.68kg (5.9lbs)		



Single shot adapter is included.

Model			Flash W			Flash W-QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzz	le Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	
Enoray (*)	Joules	30	42	46	30	42	46	
Energy (*)	ft.lbs	22	31	34	22	31	34	
Magazine (Capacity	14	12	10	14	12	10	
Air Tube Vo	olume		165cc		165cc			
Fill Pressu	re		200 BAR		200 BAR			
Number of	Shots per fill	100	95	90	100	95	90	
Number of	Shots at Optimal Velocity	48	40	38	48	40	38	
Stock			Turkish walnut			Turkish walnut		
Overall Ler	igth		915mm (36")			1075mm (42.3")		
Barrel Lenç	jth		450mm (17.7")			450mm (17.7")		
Weight			2.82kg (6.2lbs)			3.00kg (6.6lbs)		



3.15 kg (6.95 lbs)

 Weight
 3 kg (6.6 lbs)

 * Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



QuietEnergySeries

FULLY SHROUDED BARREL



FLASH 401

QUATTRO

(*) Scope sold separately



FLASH 401 QE

QuietEnergy Version QE fully shrouded barrel and Integrated Sound Moderator -Approximately 50% Quieter.

Single shot adapter is included.

Model		-	Hoteen Fleeh 401	A DECEMBER OF		steen Fleek 401 0	-	
woder	the second second	A REAL PROPERTY.	Hatsan Flash 401		The second second second second second second second second second second second second second second second se	atsan Flash 401 0	and the second	
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle	Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	
	Joules	30	42	46	30	42	46	
Energy (*)	ft.lbs	22	31	34	22	31	34	
Magazine Ca	pacity	14	14 12 10		14	12	10	
Air Tube Volu	ime		400 cc	11	400 cc			
Fill Pressure		5	200 BAR	1	200 BAR			
Number of SI	notsper fill	310	300	280	310	300	280	
Number of SI	nots at Optimal Velocity	110	105	95	110	105	95	
Stock	and the second second	and the second s	Wood stock	100		Wood stock		
Overall Leng	th search in the search is the	1	1015mm (40")			1100 mm(43,3")		
Barrel Lengt		a state of	450mm (17.7")			450mm (17.7")	100	
Weight	10 10 10 10		3.2 kg (7 lbs)		-	3.25 kg (7,2 lbs)	States of the second	

(*) Velocity resits may vary as much as 20% due to pellet weight pellet shape, temperature, elevation, as well as other factors.

(



Bullpup design, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle. Precision rifled choked barrel for accuracy, threaded for ½ " UNF sound moderator & fitted muzzle cap. 165cc volume aluminum air cylinder tube (not detachable) Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced. Manual safety. Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load. Black metal trigger.



Single shot adapter is included.

Model			FlashPup			FlashPupQE			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle \	/elocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)		
Energy (*)	Joules	30	42	46	30	42	46		
chergy ()	ft.lbs	22	31	34	22	31	34		
Magazine Cap	acity	14	12	10	14	12	10		
Air Tube Volu	ne		165cc			165cc			
Fill Pressurev			200 BAR		200 BAR				
Number of She	ots per fill	100	95	90	100	95	90		
Number of Sh	ots at Optimal Velocity	48	40	38	48	40	38		
Stock		Ambidextrous bullpup	wooden stock. Elevati	on adjustable comb.	Ambidextrous bullpup wooden stock. Elevation adjustable comb.				
Overall Length	1		645mm (25,4")			815mm (32")			
Barrel Length			450mm (17.7")			450mm (17.7")			
Weight			2.73kg (6lbs)			2.9kg (6.4lbs)			



QuietEnergySeries



FLASHPUP S



Bullpup design, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle. Precision rifled choked barrel for accuracy, threaded for ½" UNF sound moderator & fitted muzzle cap. 165cc volume steel air cylinder tube (not detachable) Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced. Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load. Black metal trigger.



Single shot adapter is included.

Model			FlashPup-S			FlashPup-S QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Ve	elocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	
F morrow (*)	Joules	30	42	46	30	42	46	
Energy (*)	ft.lbs	22	31	34	22	31	34	
Magazine Capa	city	14	12	10	14	12	10	
Air Tube Volum	e	165cc			165cc			
Fill Pressure			200 BAR		200 BAR			
Number of Shot	ts per fill	100	95	90	100	95	90	
Number of Shot	ts at Optimal Velocity	48	40	38	48	40	38	
Stock		Ambidextrous bullpup	synthetic stock. Eleval	ion adjustable comb.	Ambidextrous bullpu	p synthetic stock. Eleva	tion adjustable comb.	
Overall Length		645mm (25.4")		815mm (32")				
Barrel Length		450mm (17.7")				450mm (17.7")		
Weight			3 kg (6.6lbs)			3.19kg (7lbs)		



M1 Camo Stock version.

M2 Camo Stock version.

Flat Dark Earth Color Stock version.

Genuine bullpup design, 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle. 6 level power adjustment. Power setting can be done at a turn of the power adjustment knob. Detachable aluminum air cylinder tube (255cc). Spare cylinders

Model			Gladius			Gladius Long		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzl	e Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)	
Enormy (*)	Joules	30	42	46	36	51	57	
Energy (*)	ft.lbs	22	31	34	27	38	42	
Magazine C	apacity	10	10	9	10	10	9	
Air Tube Vo	lume		255cc		255cc			
Fill Pressur	e		200 BAR		200 BAR			
Number of S	Shots Per Fill	120	115	105	120	110	100	
Number of S Optimal Vel		65	60	50	60	50	45	
Stock		1.1.7	Bullpup, advanced polymer, thumbhole, elevation adjustable comb, adjustable butt bad			Bullpup, advanced polymer, thumbhole, elevation adjustable comb, adjustable butt bad		
Overall Len	gth	875mm (34,4")			965mm (38")			
Barrel Leng	th	495mm (19.4")			585mm (23")			
Weight			4.65kg (10.2lbs)			4.8kg (10,6lbs)		

are available. "Antidouble pellet feed" mechanism preventing more than one pellet loading into barrel. Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced. Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load. Metal trigger. Spare air cylinders with regulator are available. Long version available (Gladius Long) with 585mm barrel and 100 fps (30 m/s) more muzzle velocity.

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. * Above maximum velocity and energy figures are at power adjustment level 6.

Power Setting	Gladius Average Energy 4.5mm / .177cal	Gladius Long Average Energy 4.5mm / .177cal
6	30 Joule	36 Joule
5	26 Joule	30 Joule
4	22 Joule	26,5 Joule
3	17 Joule	21,5 Joule
2	12 Joule	15 Joule
1	7 Joule	8,5 Joule

Power Setting	Gladius Average Energy 5.5mm / .22cal	Gladius Long Average Energy 5.5mm / .22cal
6	42 Joule	51 Joule
5	36 Joule	42 Joule
4	31 Joule	36 Joule
3	24 Joule	28 Joule
2	16 Joule	19 Joule
1	10 Joule	11.5 Joule

Power Setting	Gladius Average Energy 6.35mm / .25cal	Gladius Long Average Energy 6.35mm / .25cal		
6	46 Joule	57 Joule		
5	39 Joule	46 Joule		
4	33 Joule	39 Joule		
3	25 Joule	29 Joule		
2	17,5 Joule	20 Joule		
1	10 Joule	12 Joule		



47



- Micro adjustable rear sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load. •

. Gold plated trigger blade.

Model BT65 SB (Side Bolt) BT65 RB (Rear Bolt)						
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle Veloc	ity (*)	380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)		
	Joules	40	61	71		
Energy (*)	ft.lbs	30	45	52		
Magazine Capacity	1	10	10	9		
Air Tube Volume		255cc				
Fill Pressure		200 BAR				
Shots Per Fill		70	70	65		
Shots at Optimal V	elocity	30	28	25		
Stock		Advanced polymer, montecarlo cheekpiece, adjustable butt pad & adjustable comb				
Overall Length		1080mm (42				
Barrel Length		585mm (23")				
Weight		4.1kg (9lbs)				
Fiber Optic	Rear Sight		0.9mm (.035") green			
Sights Diameters	Front Sight		1.5mm (.060") red			

Model		BT65SB-QE (Side Bolt) BT65RB-QE (Rear Bolt)				
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle Velocity (*))	380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)		
Energy	Joules	40	61	71		
LIIEIYY	ft.lbs	30	45	52		
Magazine Ca	apacity	10	10	9		
Air Tube Vol	ume	255cc				
Fill Pressure	9	200 BAR				
Shots Per Fi	II	70	70	65		
Shots at Opt Velocity	imal	30	28	25		
Stock		Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad & adjustable comb				
Overall Len	gth	1240mm (48.8")				
Barrel Leng	th	585mm (23")				
Weight			4.4kg (9.7lbs)			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

HATSAN.COM.TR



Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	Model			SB Elite -QE (Side	,
Max. Muzzle Veloc	;ity (*)	380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)	WOUGI		BT65I	RB Elite -QE (Rea	r Bolt)
Energy (*)	Joules	40	61	71	Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
chergy ()	ft.lbs	30	45	52	Max. Muzz	le Velocity (*)	380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)
Magazine Capacity	1	10	10	9	Energy	Joules	40	61	71
Air Tube Volume			255cc		LIIEIY	ft.lbs	30	45	52
Fill Pressure		200 BAR			Magazine Capacity		10 10 9		
Shots Per Fill		70	70	65	Air Tube V	olume	255cc		
Shots at Optimal V	elocity	30	28	25	Fill Pressu	re		200 BAR	
Stock		Advanced polymer, thumbhole, montecarlo cheekpiece,		Shots Per I	Fill	70	70	65	
SIUCK		adjustabl	le butt pad & adjusta	ble comb	Shots at Optimal Velocity		30	28	25
Overall Length			1080mm (42.5")		Steel		Advanced polymer, thumbhole, montecarlo cheekpiece,		
Barrel Length	rrel Length 585mm (23")		- Stock		adjustable butt pad & adjustable comb		ble comb		
Weight	/eight 4.23kg (9.3lbs)		Overall Lei	ngth	1240mm (48.8")				
Fiber Optic	Rear Sight		0.9mm (.035") green	1	Barrel Length		585mm (23")		
Sights Diameters	Front Sight		1.5mm (.060") red		Weight			4.4kg (9.7lbs)	





BT65SB-W



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.

Model		BT65 SB-W (Side Bolt) / BT65 RB-W (Rear Bolt)			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Ve	ocity (*)	380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)	
Energy (*)	Joules	40	61	71	
chergy ()	ft.lbs	30	45	52	
Magazine Capac	ity	10	10	9	
Air Tube Volume)	255cc			
Fill Pressure		200 BAR			
Shots Per Fill		70	70	65	
Shots at Optima	Velocity	30	28	25	
Stock		Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad & adjustable comb			
Overall Length		1080mm (42.5")			
Barrel Length		585mm (23")			
Weight		4.3kg (9.4lbs)			
Fiber Optic Sights Diam-	Rear Sight	0.9mm (.035") green			
eters	Front Sight	1.5mm (.060") red			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- Side bolt action or rear bolt action.
- Manual Safety
- Scope mount rail for both 11mm and 22mm
- scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics

 Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
 Gold plated trigger blade 1190fps**POWER!** with Lead Pellets QuietEnergySeries



GALATIAN

QUATTRO

Removable rear sight.
Trigger lock included.

GALATIAN I-CARBINE

Shorter (carbine) barrel version. QuietEnergy fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter. (50-60fps less velocity due to carbine barrel)

FULLY SHROUDED BARREL



- Side lever action
- Cocking indicator
- Dovetail grooved receiver for 11mm or 22mm scope mounts
- Quattro trigger
- Micro adjustable rear sight with Truglo fiber optics.
- Detachable 16-shot magazine in .177 caliber, 14-shot magazine in .22 and
- 13-shot magazine in .25

- Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock

Model	·		Galatian I		Galatian I Carbine			
Caliber	Caliber 4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25cal		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal			
Max. Muzzle Veloo	city (*)	360m/s (1190fps)	333m/s (1100fps)	303m/s (1000fps)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)	
Energy	Joules	37	53	60	33	49	54	
chergy	ft.lbs	27	39	44	24	36	40	
Magazine Capacity	/	16	14	13	16	14	13	
Air Tube Volume			255cc		255cc			
Fill Pressure		200 BAR 2			200 BAR			
Shots Per Fill		100	90	80	100	90	80	
Shots at Optimal V	/elocity	45	40	36	45	40	36	
Stock			sh Walnut Thumbho ad & Adjustable Con	· •	High Quality Turkish Walnut Thumbhole, Adjustable Butt Pad & Adjustable Comb			
Overall Length			1075mm (42.3")		1100mm (43.3")			
Barrel Length	·	585mm (23") 450mm (17.7")						
Weight		4kg (8.8lbs)			3.9kg (8.6lbs)			
Fiber Optic	Rear Sight		0.9mm (.035") green			No sights		
Sights Diameters	Front Sight		1.5mm (.060") red			No sights		





GALATIAN I - III - IV



Model		Galatian II			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Velo	city (*)	360m/s (1190fps)	333m/s (1100fps)	303m/s (1000fps)	
Enorgy	Joules	37	53	60	
Energy	ft.lbs	27	39	44	
Magazine Capacit	/	16	14	13	
Air Tube Volume			255cc		
Fill Pressure		200 BAR			
Shots Per Fill		100	90	80	
Shots at Optimal \	/elocity	45	40	36	
Stock		High Quality Turkish Walnut Adjustable Butt Pad & Adjustable Comb			
Overall Length		1075mm (42.3")			
Barrel Length		585mm (23")			
Weight		3.9kg (8.6lbs)			
Fiber Optic	Rear Sight	0.9mm (.035") green			
Sights Diameters	Front Sight		1.5mm (.060") red		

Model		Galatian III				
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle Velo	Max. Muzzle Velocity (*)		333m/s (1100fps)	303m/s (1000fps)		
Energy	Joules	37	53	60		
Energy	ft.lbs	27	39	44		
Magazine Capacity	/	16	14	13		
Air Tube Volume		255cc				
Fill Pressure		200 BAR				
Shots Per Fill		100	90	80		
Shots at Optimal V	/elocity	45	40	36		
Stock		Advanced Polymer, Thumbhole, Adjustable Butt Pad & Adjustable Comb				
Overall Length			1075mm (42.3")			
Barrel Length		585mm (23")				
Weight	Weight		4.2kg (9.2lbs)			
Fiber Optic	Rear Sight	0.9mm (.035") green				
Sights Diameters	Front Sight		1.5mm (.060") red			

Model		Galatian IV			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Velo	city (*)	360m/s (1190fps)	333m/s (1100fps)	303m/s (1000fps)	
Enorgy	Joules	37	53	60	
Energy	ft.lbs	27	39	44	
Magazine Capacity	/	16	14	13	
Air Tube Volume			255cc		
Fill Pressure		200 BAR			
Shots Per Fill		100	90	80	
Shots at Optimal V	/elocity	45	40	36	
Stock		Advanced Polymer, Adjustable Butt Pad & Adjustable Comb			
Overall Length		1075mm (42.3")			
Barrel Length 585mm (23")					
Weight		4.15kg (9.1lbs)			
Fiber Optic	Rear Sight		0.9mm (.035") greer	1	
Sights Diameters	Front Sight	1.5mm (.060") red			





Shorter (carbine) barrel version. QuietEnergy fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter. (50-60fps less velocity due to carbine barrel)

Model		Galatian II Carbine			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Velo	city (*)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)	
Enorgy	Joules	33	49	54	
Energy	ft.lbs	24	36	40	
Magazine Capacity	/	16	14	13	
Air Tube Volume			255cc		
Fill Pressure		200 BAR			
Shots Per Fill		100	90	80	
Shots at Optimal V	/elocity	45	40	36	
Stock		High Quality Turkish Walnut Adjustable Butt Pad & Adjustable Comb			
Overall Length		1100mm (43.3")			
Barrel Length		450mm (17.7")			
Weight		3.8kg (8.4lbs)			
Fiber Optic Rear Sight		No Sights			
Sights Diameters	Front Sight		No Sights		

Model		Galatian III Carbine				
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle Velo	city (*)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)		
Enorgy	Joules	33	49	54		
Energy	ft.lbs	24	36	40		
Magazine Capacity	/	16	14	13		
Air Tube Volume			255cc			
Fill Pressure		200 BAR				
Shots Per Fill		100	90	80		
Shots at Optimal V	/elocity	45	40	36		
Stock		Advanced Polymer, Thumbhole, Adjustable Butt Pad & Adjustable Comb				
Overall Length		1100mm (43.3")				
Barrel Length	Barrel Length 450mm (17.7")					
Weight		4.1kg (9lbs)				
Fiber Optic	Rear Sight	No Sights				
Sights Diameters	Front Sight		No Sights			

Model		Galatian IV Carbine			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Velo	city (*)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)	
Enorgy	Joules	33	49	54	
Energy	ft.lbs	24	36	40	
Magazine Capacit	y	16	14	13	
Air Tube Volume			255cc		
Fill Pressure		200 BAR			
Shots Per Fill		100	90	80	
Shots at Optimal \	/elocity	45	40	36	
Stock		Advanced Polymer, Adjustable Butt Pad & Adjustable Comb			
Overall Length		1100mm (43.3")			
Barrel Length			450mm (17.7")		
Weight		4.05kg (8.9lbs)			
Fiber Optic	Rear Sight	No Sights			
Sights Diameters	Front Sight		No Sights		







AT44-10 TACT





QUATTRO

Telescopic stock can be removed, allowing the use with pistol grip only.

- Manual & Auto Safety.
- Scope mount rail good for both 11 mm and 22 mm scope mounts
- 10-shot magazine (9-shot magazine
- in .25 /6.35mm caliber)
- Micro adjustable rear sight

Model			AT44-10 Tact QE		AT	44-10 Tact Long	QE	
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	
Max. Muzzle Veloc	;ity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)	
Energy	Joules	30	42	46	36	51	57	
Energy	ft.lbs	22	31	34	27	38	42	
Magazine Capacity	1	10	10	9	10	10	9	
Air Tube Volume			180cc			230cc		
Fill Pressure			200 BAR			200 BAR		
Shots Per Fill		115	110	95	115	110	95	
Shots at Optimal V	elocity	60	55	45	55	50	40	
Stock			escopic Stock / Adju dvanced Polymer Gr		Tactical Telescopic Stock / Adjustable Comb Advanced Polymer Grip			
Overall Length	Butt Shortened		1045mm (41")		1135 (44.6")			
Overall Length Butt Extended			1145mm (45")			1235 (48.6")		
Barrel Length		495mm (19.4")			585mm (23")			
Weight			4.3kg (9.5lbs)			4.7kg (10.4lbs)		



QuietEnergySeries





Model			AT44-10 Tact			AT44-10 Tact Long	9
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Veloc	ity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Enormy	Joules	30	42	46	36	51	57
Energy	ft.lbs	22	31	34	27	38	42
Magazine Capacity		10	10	9	10		
Air Tube Volume			180cc	·		230cc	
Fill Pressure			200 BAR			200 BAR	
Shots Per Fill		115	110	95	115	110	95
Shots at Optimal V	elocity	60	55	45	55	50	40
Stock			scopic Stock / Adjus dvanced Polymer Gr		Tactical Telescopic Stock / Adjustable Comb / Advanced Polymer Grip		
Overall Length	Butt Shortened		885mm (34.8")			980mm (38.6")	
Overall Length	Butt Extended		985mm (38.8")			1080mm (42.5")	
Barrel Length			495mm (19.4")			585mm (23")	
Weight		3.9kg (8.6lbs)			4.3kg (9.5lbs)		
Fiber Optic Sights	Rear Sight			0.9mm (.C)35") green		
Diameters	Front Sight			1.5mm (.060") red		









58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.

Model			AT44-10			AT44-10 Long	
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*) Joules		30	42	46	36	51	57
Energy (*)	ft.lbs	22	31	34	27	38	42
Magazine Capacity		10	10	9	10	10	9
Air Tube Volume			180cc			230cc	
Fill Pressure				200	BAR		
Shots Per Fill		115	110	95	115	110	95
Shots at Optimal Vel	ocity	60	55	45	55	50	40
Stock			Advanced polyme	r, thumbhole, elevatio	n adjustable comb, ad	justable butt pad.	
Overall Length			990mm(39")			1085mm (42.7")	
Barrel Length			490mm (19.3")			585mm (23")	
Weight 3.3kg (7.3lbs)			3.70kg (8.1lbs)				
Fiber Optic Sights Rear Sight				0.9mm (.0	35") green		
Diameters	Front Sight			1.5mm (.	060") red		



QuietEnergySeries





OUATTRO

OUATTRO

AT44W-10 LONG

Long version with 230 cc air cylinder tube, 58 cm barrel and 100 fps (30 m/s) more muzzle velocity.

• Manual & Auto Safety.

- Scope mount rail for both 11 mm and 22 mm scope mounts.
 10-shot magazine (9-shot magazine in .25/6.35mm caliber)
- Micro adjustable rear sight.

FULLY SHROUDED

BARREL

QuietEnergy Version QE fully shrouded barrel and Integrated Sound Moderator -Approximately 50% Quieter.

AT44W-10 QE

Elevation & fit angle adjustable rubber butt pad.



Model AT44W-10 AT44W-10 Long Caliber 4.5mm / .177cal 5.5mm / .22cal 6.35mm / .25cal 4.5mm / .177cal 6.35mm / .25cal 5.5mm / .22cal Max. Muzzle Velocity (*) 325m/s (1070fps) 295m/s (970fps) 265m/s (870fps) 355m/s (1170fps) 325m/s (1070fps) 295m/s (970fps) 30 42 51 57 Joules 46 36 Energy (*) ft.lbs 22 31 34 27 38 42 **Magazine Capacity** 10 10 9 10 10 9 180cc 230cc **Air Tube Volume Fill Pressure** 200 BAR 200 BAR **Shots Per Fill** 115 110 95 115 110 95 Shots at Optimal Velocity 55 55 50 40 60 45 Genuine Turkish walnut, montecarlo cheekpiece, Genuine Turkish walnut, montecarlo cheekpiece, Stock adjustable butt pad. adjustable butt pad. **Overall Length** 990mm (39") 1085mm (42.7") **Barrel Length** 490mm (19.3") 585mm (23") Weight 3.6kg (7.9lbs) 4kg (8.8lbs) **Fiber Optic Rear Sight** 0.9mm (.035") green 0.9mm (.035") green **Sights Diameters** Front Sight 1.5mm (.060") red 1.5mm (.060") red

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

Quattro Trigger: 2-stage full adjustable match trigger for trigger

travel and trigger load.
Gold plated trigger blade



Model			AT44-10 QE			AT44-10 Long QE			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle	e Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)		
Enormy	Joules	30	42	46	36	51	57		
Energy	ft.lbs	22	31	34	27	38	42		
Magazine Ca	apacity	10	10	9	10	10	9		
Air Tube Vo	lume		180cc			230cc			
Fill Pressure	e		200 BAR			200 BAR			
Shots Per Fi	ill	115	110	95	115	110	95		
Shots at Opt	timal Velocity	60	55	45	55	50	40		
Stock			mer, thumbhole, eleva mb adjustable butt pa	,	Advanced polymer, thumbhole, elevation adjustable comb adjustable butt pad.				
Overall Len	gth		1155mm (39.4")			1245mm (42.7")			
Barrel Lengi	th	495mm (19.4")			585mm (23")				
Weight			3.7kg (8.1lbs)			4.10kg (9lbs)			







Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.

Model			AT44S-10			AT44S-10 Long	
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Veloc	;ity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules	30	42	46	36	51	57
ft.lbs	ft.lbs	22	31	34	27	38	42
Magazine Capacity		10	10	9	10	10	9
Air Tube Volume			180cc			230cc	
Fill Pressure				200	BAR		
Shots Per Fill		115	110	95	115	110	95
Shots at Optimal V	elocity	60	55	45	55	50	40
Stock			Advanced p	olymer, montecarlo	cheekpiece, adjusta	ble butt pad.	
Overall Length			990mm (39")			1085mm (42.7")	
Barrel Length			490mm (19.3")			585mm (23")	
Weight		3.2kg (7lbs) 3.6kg (7.9lbs)					
Fiber Optic Sights	Rear Sight			0.9mm (.0	035") green		
Diameters	Front Sight			1.5mm (.060") red		



 Elavation adjustable comb which can be easily adjusted by a coin. Elevation & fit angle

adjustable rubber butt pad.







MAGAZINES **AND PELLETS**



10-SHOT MAGAZINE

- Easily mounts to all AT44 & BT65 10-shot PCP series air rifles.
- Light in weight and made of aluminum.
- Spare 10-shot magazines are available in 177 (4.5mm) and .22 (5.5mm) calibers.
- Spare 9-shot magazines are available in .25 (6.35mm) caliber



GALATIAN MAGAZINE

Spare magazines for Galatian PCP air rifles are available in 16 shot in .177 (4.5mm), 14 shot in .22 (5.5mm) and 13 shot in .25 (6.35mm) caliber.



21-shot magazine in .22 (5.5mm), 19-shot magazine in .25 (6.35mm) and 16-shot magazine in .30 (7.62mm) caliber



Speed maa loader can be used with Blitz magazines

HIGH CAPACITY MAGAZINE



High capacity magazine can be used in all Factor models

HATSAN POINTED HEAD PELLETS

High performance, accurate and precise for pest control and precision shooting at larger distances. Pointed head & waisted design lead pellets providing maximum penetration on the target. Recommended to use on Hatsan products. Hatsan pointed head pellets are available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) calibers.



- .177 (4.5mm) caliber Hatsan pointed head pellets. 200 pellets per tin.
- Weight: 0.545grams / 8.41grains.



- .22 (5.5mm) caliber Hatsan pointed head pellets. 300 pellets per tin.
- Weight: 0.910 grams / 14grains.



- .25 (6.35mm) caliber Hatsan pointed head pellets. 200 pellets per tin.
- Weight: 1,61grams / 24,85 grains.



ACCESSORIES



- Reduces the sound significantly.
- ½" UNF threaded and easily mountable on the muzzle.
- Made of aluminum alloy and light in weight.

EXTENDED MUZZLE BREAK • Extended & ported muzzle break for a different look.

½" UNF threaded and easily mountable on the muzzle.



AIR STRIPPER

Air stripper helps to get better accuracy and grouping by decreasing the air turbulence at the muzzle as the pellet leaves the muzzle. HATSAN HAND PUMP

PCP

- The most convenient and affordable way to charge your PCP air rifle.
- Maximum 200 bar fill pressure.Ergonomically designed handle with
- synthetic cover.
 Built-in moisture trap embedded in the handle which traps the moisture and protects your pump & air rifle.
- Built-in particle filter embedded in the handle which traps the dust & dirt and protects your pump & air rifle.
- Additional compartment in the other handle where you can put spare parts and O-rings of the pump or small belongings.
- Built-in precise pressure gauge embedded in the frame which protects it from external impacts.
- Easily demountable design.
- Specialist design wide foot plate with adjustable pumping angle.
- Comes with hose and connector.

AIR TUBE CYLINDER

- Detachable air cylinder
 - Maximum fill pressure 200 bar.
- Easily screws in to the all Hatsan AT44 PCP series air rifles.
- Possibility of refilling the air tube while on the rifle or detached.



Designed to fill air into the air cylinder of your PCP from scuba tanks. The quickest method to fill your PCP.



Foregrip with expandable bipod

HATSAN PCP BAG Special design bag fitting all Hatsan PCP air rifles.

Made of quality and waterproof material and can carry your air rifle with scope mounted.





UNIQUE FEATURES FROMHATSAN

QUATTRO Quattro Trigger

This advanced two-stage match trigger is only available from Hatsan. It offers threepoint adjustment to control the trigger load, the position of the first and second stages of the firing cycle, and the length of trigger travel—all while maintaining full sear engagement. The custom trigger also allows you to release finger pressure if the shot cannot be taken after engaging in the first stage of the firing cycle, automatically returning the trigger to full engagement. And a drop safety interlock device has been incorporated to eliminate the possibility of the airgun accidentally firing if it's dropped (whether or not the safety is on).



The proprietary Shock Absorber System reduces vibration and increases the life of the gun, optics, and accessories.



Ucle Fiber Optics

Fiber-optic technology has been integrated into a microadjustable rear sight and front sight to lend more accuracy to your shot.



QuietEnergy Sound moderator in fully shrouded barrel for reduced down-range noise-Approximately 50% Quieter.



XRS - Recoil Reduction System

Hatsan air pistols are equipped with Hatsan's "XRS-Recoil Reduction System" for a noticeably smooth shot. Recoil is absorbed during the shot by the design of the sliding action. This makes for a more accurate and comfortable shooting experience.

TRIOPAD® Butt System

Maximum recoil absorption provides added comfort, and three stock spacers allow adjustments for appropriate length of pull.



WHY HATSAN VORTEX GAS PISTONS?

Unlike our competitors, Hatsan Vortex Gas Pistons technology is developed and manufactured by Hatsan to be specifically used in most Hatsan Break Barrel and Under Lever airguns. Hatsan Vortex Gas Pistons utilize regular air instead of any other type of gas. Hatsan offers 6 different types of Hatsan Vortex Gas Pistons – encompassing the majority of Hatsan's line of Break Barrel and Underlever spring action guns. The following models are offered:

OS VORTEX GAS PISTON

Type 1	: Mod 55-60-70-75-80-85-90
Type 1-B	: Mod 88-95-99
Type 2	: Mod125-125TH-125 Sniper-135 -Torpedo 150-150TH-155
Type 3	: Striker 1000S-1000X-Edge
Type 4	: Dominator under lever series
Type 5	: Torpedo 100X-105X under lever series
Type 6	: Mod25 SuperCharger / SuperTact
Type 7	: Proxima

- More steady and consistent power between consecutive shots.
- Eliminates most vibration caused by oscillation of heavy springs.
- Much smoother and quieter shooting experience.

Benefits of Gas Piston Airguns

- Gas piston powered airguns can remain cocked for long periods of time without causing any spring stress or damage to the gun.
- Gas piston powered airguns produce more steady and consistent power between consecutive shots versus spring powered airguns.
- Gas Piston powered airguns eliminate most of the vibration caused by the oscillation of the heavy springs used in spring powered airguns. Gas Piston models oscillate much less and finish the action cycle in less time than spring powered models making for a more comfortable confident shooting experience.
- Gas piston powered airguns' lifecycle is significantly greater than its spring action counterparts. There is no risk of spring fatigue or spring breakage. Fewer moving parts result in a much more efficient and reliable operating system.
- Gas piston powered airguns provide higher, consistent velocities over their lifetime when compared to spring action models. Springs get weaker over time causing decreases in velocity.
- Gas piston powered airguns provide a much smoother and quieter shooting experience than their spring action counterparts. With gas powered models, the cocking action is much smoother. Also, spring grinding noises are eliminated during the cocking and firing sequence.





Model			MOD 125			MOD 125TH		
Caliber		4.5 mm / .177 cal	5.5 mm / . 22 cal	6.35 mm / .25 cal	4.5 mm / .177 cal	5.5 mm / . 22 cal	6.35 mm / .25 cal	
Max. Muzzle Veloc	ity (*)	*) 380 m/s (1250 fps) 305 m/s (1000 fps) 230 m/s (750 fps) 380 m/s (1250 fps) 305 m/s (1000 f				305 m/s (1000 fps)	230 m/s (750 fps)	
Stock		Advanced Polymer	with montecarlo chee butt system	ekpiece & Triopad		ed Polymer with thum montecarlo cheekpiec		
Length			1240 mm (48.8")			1205 mm (47.4")		
Barrel Length			450mm (17.7")			450mm (17.7")		
Weight			3.8 kg (8.4 lbs)			4.1 kg (9 lbs)		
Fiber Optic	Rear Sight	(0.9 mm (.035") green			0.9 mm (.035") green		
Sights Diameters	Front Sight		1.5 mm (.060") red	1.5 mm (.060") red				

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





MOD 125 RO D



Model	Caliber	Max. Muzzle Velocity (*)	Stock	Longth	Barrel	Weight	Fiber Optic Sights Diameters	
Wouer	Galibei	wax. wuzzie velocity ()	SIUCK	Length	Length	weigin	Rear Sight	Front Sight
	4.5mm / .177cal	380 m/s (1250 fps)	Advanced Delumer	1005mm	45 am	0.001/2	0.0mm (005")	1 Emm (000")
MOD 125 PRO	5.5mm /.22cal	305 m/s (1000 fps)	Advanced Polymer with thumbhole	1205mm (47.4")	45cm (17.7")	3,96kg (8.8lbs)	0.9mm (.035") green	1.5mm (.060") red
	6.35mm / .25cal	230 m/s (750 fps)	with thumbhold	(47.4)	(17.7.)	(8,8105)	green	icu



The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





MOD 125 SNIPER







Model	-		MOD 125 Sniper		
Caliber		4.5 mm / .177 cal	5.5 mm / . 22 cal	6.35 mm / .25 cal	
Max. Muzzle Velo	city (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)	
Stock		Advanced Poly	mer with elevation adj	ustable comb	
Length			1240 mm (48.8")		
Barrel Length			360mm (14.2")		
Weight			4.1 kg (9 lbs)		
Fiber Optic	Rear Sight	0.9 mm (.035") green			
Sights Diameters	Front Sight		1.5 mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

TRIOPAD[®] Butt System

The Hatsan TRIOPAD[®] Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.

	ets			OC		17		Serious. Solid. Imp
								Jenuas avas my
				SN			R	
						FULLY SH	IRNIIDED	
	6					BAR		
Availa	ble in 5	Ucal.			5			
			C	ASCRET	a			
		18	~					
							QE fully s	nergy Version hrouded barrel and Sound Moderator -
			QUATTR	Jaj	Gas Piston Upgrad	STON 💙		Sound Moderator - nately 50% Quieter.
lodel aliber		.5mm / .177cal	Mod1350		mm / .30cal			
ander lax. Muzzle Velocity (n/s (550 fps)	1 1 2		
tock			dvanced Polymer elev	vation adjustable comb				8
ength			1182mm 270mm	n (46.5")				
arral I annth			2101111					
arrel Length /eight			4.15kg ((9.15IDS)				
leight iber Optic Rea ights Diameters Fro bove maximum muzzle ve	r particular counti	ry can be achieve	0.9mm (.0 1.5mm (. g on the pellet weight & d by the reduction in the	335") green .060") red 8 shape. e muzzle velocity. The above ma	aximum sold separately	Includes 3	3 stock spacers to ext	end to stock length.
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (. g on the pellet weight & d by the reduction in the	335") green .060") red 8 shape. e muzzle velocity. The above ma			3 stock spacers to ext	SQE
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (. g on the pellet weight & d by the reduction in the on the air rifle.	135") green .060") red & shape. e muzzle velocity. The above ma (*) Scope s (*) Scope s			MOD 135	SQE
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (. g on the pellet weight & d by the reduction in the on the air rifle.	135") green .060") red & shape. e muzzle velocity. The above ma (*) Scope s (*)	Genuin	MOD 135 e walnut stock v Mod135QE	SQE version.	
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (. g on the pellet weight & d by the reduction in the on the air rifle.	135") green .060") red & shape. e muzzle velocity. The above ma (*) Scope s (*) Scope s	sold separately		MOD 135	SQE
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (. g on the pellet weight & d by the reduction in the on the air rifle.	135") green .060") red & shape. e muzzle velocity. The above ma (*) Scope s (*) sold separately	Genuin 4.5mm/.177cal 380 m/s (1250 fps)	MOD 135 e walnut stock v Mod135QE 5.5mm/.22cal	6.35mm/.25cal 230 m/s (750 fps)	
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (.) g on the pellet weight & d by the reduction in the on the air rifle.	135") green .060") red & shape. e muzzle velocity. The above ma (*) Scope s (*) sold separately	Genuin 4.5mm/.177cal 380 m/s (1250 fps)	Mod135QE 5.5mm/.22cal 305 m/s (1000 fps)	6.35mm/.25cal 230 m/s (750 fps)	
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (10 1.5mm (.1 g on the pellet weight & d by the reduction in the on the air rifle.	135") green .060") red & shape. e muzzle velocity. The above mod (*) Scope s (*) Scope s (*) Scope s (*) Scope s ted metal r blade. Model Caliber Max. Muzzle Velo Stock	sold separately	Genuin 4.5mm/.177cal 380 m/s (1250 fps)	MOD 135 e walnut stock v Mod1350E 5.5mm/.22cal 305 m/s (1000 fps) sh walnut elevation ad	6.35mm/.25cal 230 m/s (750 fps)
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (.1 g on the pellet weight & d by the reduction in the on the air rifle.	135") green .060") red & shape. e muzzle velocity. The above mod (*) Scope s (*) sold separately	Genuin 4.5mm/.177cal 380 m/s (1250 fps)	Mod135QE 5.5mm/.22cal 305 m/s (1000 fps) sh walnut elevation ad 1200mm (47.2")	6.35mm/.25cal 230 m/s (750 fps)	
leight iber Optic ights Diameters Fro bove maximum muzzle ve he energy restrictions of a	ont Sight elocity figures mo	ry can be achieve	0.9mm (.0 1.5mm (.1 g on the pellet weight & d by the reduction in the on the air rifle.	135") green 1360") red & shape. e muzzle velocity. The above model (*) Scope so (*)	sold separately	Genuin 4.5mm/.177cal 380 m/s (1250 fps)	Mod135QE 5.5mm/.22cal 305 m/s (1000 fps) sh walnut elevation ad 1200mm (47.2") 270mm (10.6")	6.35mm/.25cal 230 m/s (750 fps)



Model			Mod1	30QE				
Caliber		4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal	7.62mm / .30cal			
Max. Muzzle Veloc	city (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)	170 m/s (550 fps)			
Stock		Advar	iced Polymer, thumbho	le elevation adjustable	comb			
Length			1180mm	n (46.4")				
Barrel Length			270 mm	(10.6")				
Weight			4.26kg	(9.4lbs)				
Fiber Optic	Rear Sight		0.9mm (.035") green					
Sights Diameters	Front Sight		1.5mm (.	060") red				

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Model			Mod	130			
Caliber		4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal	7.62mm / .30cal		
Max. Muzzle Velo	city (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)	170 m/s (550 fps)		
Stock		Advanced Polymer, thumbhole elevation adjustable comb					
Length			1238mm	n (48.7")			
Barrel Length			415mm	(16.3")			
Weight			4.36kg	(9.6lbs)			
Fiber Optic	Rear Sight	0.9mm (.035") green					
Sights Diameters	Front Sight		1.5mm (.	060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





MOD 135



Optima 1x40 Red Dot Sight & Aluminum Sound Moderator equipped version. (No sights) 430mm (17") barrel length.

MOD 135 SP

Optima 3-9x32 Scope & Ported Muzzle Break equipped version. (No sights) 405mm (15.9") barrel length.

Model		MOD 135		
Caliber		4.5 mm / .177 cal	5.5 mm / . 22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock		Turkish Walnut with montecarlo cheekpiece		
Length		1200 mm (47.2")		
Barrel Length		450 mm (17.7")		
Weight		4.2 kg (9.2 lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

OUATTRO

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



TRIOPAD® Butt System

The Hatsan TRIOPAD[®] Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.

- Combo scope mount rail good for both
- 11 mm and 22 mm mounts.
- 1 Shock absorber scope stop
- Manual Safety. Automatic Safety.
- Anti Bear-Trap.



FULLY SHROUDED





CARNIVORE 135 7.62mm <u>caliber (.30cal) big bore</u>



7.62mm caliber (.30cal) big bore. Single shot break barrel action. QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter**. Quattro Trigger is a 2-Stage fully adjustable match trigger system. SAS Shock Absorber System significantly reduces vibration. High quality and genuine Turkish walnut stock-hunting style, ergonomic and stylish design and montecarlo cheekpiece. Elevation adjustable comb. Checkering on grip and forearm for better control and feel. Scope mount rail for both 11mm & 22mm mounts. Shock absorber scope stop. Gold plated trigger blade. Precision rifled steel barrel. Manual safety & automatic cocking safety. Anti bear-trap safety. Micro adjustable rear sight for both windage and elevation with Truglo fiber optics. Open metal front sight with Truglo fiber optics.





Model		Carnivore 135	
Caliber		7.62mm / .30cal	
Max. Muzzle Velocity (*)		170 m/s (550 fps)	
Stock		Genuine Turkish walnut elevation adjustable comb	
Length		1200mm (47.2")	
Barrel Length		270mm (10.6")	
Weight		4.35kg (9.6lbs)	
Fiber Optic	Rear Sight	0.9mm (.035") green	
Sights Diameters	Front Sight	1.5mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

Elevation adjustable comb







Integrated Sound Moderator Sound moderator in muzzlebreak for reduced down-range noise



Break barrel 12 shot repeater in .177 (4.5mm) and 10 shot repeater in .22 (5.5mm) caliber. Includes 2 detachable Rapid Performance Mag (RPM) magazines. With a single motion, Hatsan's "EZ-Load Action System" quickly cocks and loads the gun. Vortex gas piston power source. Integrated Sound Moderator in muzzle break for reduced down-range noise. Quattro Trigger is a 2-Stage fully adjustable match trigger system. SAS- Shock Absorber System significantly reduces vibration. Manual safety & automatic cocking safety. Anti bear-trap cocking arm safety. Metal trigger blade.

> Foldable front sight with Truglo fiber

optics



Model		SpeedFire1250		
Caliber		4.5mm / .177cal	5.5mm /.22cal	
Max. Muzzle Velocity-Le	ead Pellet (*)	380m/s (1250fps)	305m/s (1000fps)	
Energy		24 Joule (18 ft/lbs)	27 Joule (20 ft/lbs)	
Magazine Capacity		12	10	
Stock		Advanced Polymer		
Length		1243mm (48.9")		
Barrel Length		360mm (14")		
Weight		3.6kg (7.9lbs)	
Fiber Optic Sights Rear Sight		0.9mm (.035") green		
Diameters	Front Sight	1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





Break barrel 12 shot repeater in .177 (4.5mm) and 10 shot repeater in .22 (5.5mm) caliber. Includes 2 detachable Rapid Performance Mag (RPM) magazines. With a single motion, Hatsan's "EZ-Load Action System" quickly cocks and loads the gun. Vortex gas piston power source. Integrated Sound Moderator in muzzle break for reduced down-range noise. Precision rifled steel barrel with synthetic shroud. Quattro Trigger is a 2-Stage fully adjustable match trigger system. SAS- Shock Absorber System significantly reduces vibration. Manual safety & automatic cocking safety. Anti bear-trap cocking arm safety. Stylish design ambidextrous synthetic stock. Metal trigger blade.



Model		Spee	dFire	SpeedFire W		
Caliber		4.5mm / .177cal	5.5mm /.22cal	4.5mm / .177cal	5.5mm /.22cal	
Max. Muzzle Velocity-Le	ad Pellet (*)	305 m/s (1000 fps)	245 m/s (800 fps)	305 m/s (1000 fps)	245 m/s (800 fps)	
Energy		24 Joule (18 ft/lbs)	27 Joule (20 ft/lbs)	24 Joule (18 ft/lbs)	27 Joule (20 ft/lbs)	
Magazine Capacity	Magazine Capacity		10	12	10	
Stock	Stock		Advanced Polymer		Inut	
Length		1190mm (46.85")		1195mm (47")		
Barrel Length		370mm (14.5")		370mm	(14.5")	
Weight		3kg (6.6lbs) 3.4kg (7.5lbs)		7.5lbs)		
Fiber Optic	Rear Sight	0.9mm (.035") green		0.9mm (.035") green		
Sights	Front Sight	1.5mm (.(060") red	1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

74-





PROXIMA **UNDERLEVER**





QUATTRO

power source. Black chrome finish barrel and cylinder provides maximum corrosion resistance. Fixed barrel / under lever cocking system. Quattro Trigger is a 2-Stage fully adjustable match trigger system. SAS- Shock Absorber System significantly reduces vibration. Anti bear-trap cocking arm safety. Stylish design genuine Turkish walnut ambidextrous stock. Scope mount rail & shock absorber scope stop. Gold plated trigger blade. Includes 3 stock spacers to extend to stock length.



Elevation adjustable comb.



Three stock length of pull spacers are included. The stock length of pull can be extended by increments of 5mm (1/5") by simply inserting one or more of these spacers. With these spacers any shooter can perfectly fit the suitable stock length of pull.



Model		Proxima				
Caliber		4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal		
Max. Muzzle Velo	city (*)	250m/s (820fps)	220m/s (720fps)	190m/s (620fps)		
Magazine Capacity	Magazine Capacity		14 12 10			
Stock		Geniune Turkish walnut. Ambidextrous and ergonomic design with thumbhole. Elevation adjustable comb.				
Overall Length			1153mm (45.4")			
Barrel Length			420mm (15.5")			
Weight		4.25kg (9.3lbs)				
Fiber Optic	Rear Sight	0	.9mm (.035") gree	n		
Sights Diameters	Front Sight		1.5mm (.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle

Includes 2 detachable clip magazines

14 shot magazine in .177 (4.5 mm), 12 shot magazine in .22 (5.5 mm) and 10 shot magazine in

.25 (6.35 mm) caliber.



* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle



Model		Torpedo 150			Torpedo 150TH		
Caliber		4.5 mm / .177 cal	5.5 mm / . 22 cal	6.35 mm / .25 cal	4.5 mm / .177 cal	5.5 mm / . 22 cal	6.35 mm / .25 cal
Max. Muzzle Veloc	;ity (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)	s) 380 m/s (1250 fps) 305 m/s (1000 fps) 230 m/s (75		230 m/s (750 fps)
Stock	·	Advanced Polymer with montecarlo cheekpiece			Advanced Polymer with thumbhole & montecarlo cheekpiece		
Length			1210 mm (47.6") 1170 mm (46")				
Barrel Length		430 mm (17")				430 mm (17")	
Weight		4.3 kg (9.4lbs)			4.6 kg (10 lbs)		
Fiber Optic	Rear Sight	0.9 mm (.035") green		0.9 mm (.035") green			
Sights Diameters	Front Sight	1.5 mm (.060") red 1.5 mm (.060") red					

 * Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





TORPEDO 155 UNDERLEVER



Gold plated metal trigger blade.



Fixed barrel & under lever cocking system.



Combo scope mount rail good for both 11 mm and 22 mm mounts.

- 1 Shock absorber scope stop
- Manual Safety.
- Automatic Safety
- Anti Bear-Trap.



Bolt action loading system providing maximum power.

Model		Torpedo 155				
Caliber	Caliber		5.5 mm / . 22 cal	6.35 mm / .25 cal		
Max. Muzzle Velo	city (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)		
Stock		Turkish Walnut with montecarlo cheekpiece				
Length		1210 mm (47.6")				
Barrel Length		430 mm (17")				
Weight		4.8 kg (11 lbs)				
Fiber Optic	Rear Sight	0.9 mm (.035") green				
Sights Diameters	Front Sight	1.5 mm (.060") red				

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



QuietEnergySeries



TORPEDO 150 SNIPER UNDERLEVER





Model		Т	orpedo 150 Sniper			
Caliber		4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal		
Max. Muzzle Veloc	ity (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)		
Stock		Advanced Polymer thumbhole ambidextrous stock with adjustable comb and adjustable butt				
Length		1230 (48.4")				
Barrel Length		330 mm (13 ")				
Weight		4.2 kg (9.2 lbs)				
Fiber Optic	Rear Sight	0.9mm (.035") green				
Sights Diameters	Front Sight	1.5mm (.060") red				

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





Elevation adjustable comb.

HATSAN.COM.TR



Model		Torpedo 100X			Torpedo 105X		
Caliber	Caliber		5.5 mm / . 22 cal	6.35 mm / .25 cal	4.5 mm / .177 cal	5.5 mm / . 22 cal	6.35 mm / .25 cal
Max. Muzzle Veloc	Muzzle Velocity (*) 305 m/s (1000 fps) 245 m/s (800 fps) 200 m/s (650 fps)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)		
Stock		Turkish Walnut with montecarlo cheekpiece			Advanced Polymer with montecarlo cheekpiece		
Length		1200 mm (47.2")		1200 mm (47.2")			
Barrel Length			430 mm (17")		430 mm (17")		
Weight			4.2 kg (9.2 lbs)		3.9 kg (8.6 lbs)		
Fiber Optic	Rear Sight	0.9 mm (.035") green		0.9 mm (.035") green			
Sights Diameters	Front Sight	1.5 mm (.060") red		1.5 mm (.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle. *1000* fps**POWER!** with Lead Pellets **QuietEnergy**Series **MOD 87** Serious. Solid. Impact Fully shrouded barrel. QuietEnergy Version QE fully shrouded barrel and **V**@RTEX OUATTRO Integrated Sound Moderator -Approximately 50% Quieter.

Metal triager blade

	Metal trigger blade							
Model			Mod87QE			Mod87W-QE		
Caliber	Caliber		5.5mm /.22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal	
Max. Muzzle Veloc	ity (*)	305 m/s (1000 fps) 245 m/s (800 fps) 200 m/s (650 fps) 305 m/s (1000 fps) 245 m/s (80			245 m/s (800 fps)	200 m/s (650 fps)		
Stock		Advanced Polymer elevation adjustable comb			Genuine Turkish walnut elevation adjustable comb			
Length			1132mm (44.5")		1142mm (45")			
Barrel Length			270mm (10.6")		270mm (10.6")			
Weight			3.35kg (7.4lbs)			4.07kg (8.9lbs)		
Fiber Optic	Rear Sight	0.9mm (.035") green			0.9mm (.035") green			
Sights Diameters	Front Sight		1.5mm (.060") red		1.5mm (.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Model		Mod87				
Caliber		4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal		
Max. Muzzle Veloc	ity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)		
Stock Stock Advanced Polymer elevation adjustabl				justable comb		
Length		1150 mm (45.3")				
Barrel Length			450 mm (17.7")			
Weight		3.7kg (8,1lbs)				
Fiber Optic	Rear Sight	(0.9mm (.035") green			
Sights Diameters	Front Sight	1.5mm (.060") red				

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



adjustment wheel - eliminating need for wrenches.





MOD 65



Integrated Sound Moderator Sound moderator in muzzlebreak for reduced down-range noise

1111





Model		MOD 65				
Caliber		4.5mm / .177 cal	5.5mm / . 22 cal	6.35mm / .25 cal		
Max. Muzzle Veloci	ty-Lead Pellet (*)	305m/s (1000 fps)	245m/s (800 fps)	200m/s (650 fps)		
Stock		Turkish Walnut				
Length		1185mm (46.6")				
Barrel Length		370mm (14.5")				
Weight		3kg (6.6lbs)				
Fiber Optic Sights Rear Sight		0.9mm (.035") green				
Diameters	Front Sight	1.5mm (.060") red				

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. *The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



















TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.

Model

Caliber

MOD 85 4.5 mm / .177 cal 6.35 mm / .25 cal 5.5 mm / . 22 cal 305 m/s (1000 fps) 245 m/s (800 fps) Max. Muzzle Velocity (*) 200 m/s (650 fps)

Grooved cylinder for 11mm mounts mounted

Manual Safety.

Automatic Safety.

Anti Bear-Trap.

scope stop.

Stock		Advanced Polymer with montecarlo cheekpiece & Triopad butt system		
Length		1125 mm (44")		
Barrel Length		450 mm (17.7")		
Weight		3.3 kg (7.2 lbs)		
Fiber Optic	Rear Sight	0.9 mm (.035") green		
Sights Diameters	Front Sight	1.5 mm (.060") red		

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. *The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. *The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.







Model		MOD 55S					
Caliber		4.5mm / .177 cal	5.5mm / . 22 cal	6.35mm / .25 cal			
Max. Muzzle Veloci	ty (*)	305m/s (1000 fps)	245m/s (800 fps)	200m/s (650 fps)			
Stock		Wooden					
Length		1140mm (45")					
Barrel Length			450mm (17.7")				
Weight			3.4kg (7.5 lbs)				
Fiber Optic	Rear Sight	0.9mm (.035") green					
Sights Diameters	Front Sight	1.5mm (.060") red					

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. *The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





(*) Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature elevation as well as other factors. Above Maximum muzzle velocity figures may differ depending on the pellet weight & shape. The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





AIRTACT

RTEX





AIRTACT ED



Moderator for reduced down-range noise



C



Model		AirTact / AirTact ED / AirTact PD				
Caliber		4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal		
Max. Muzzle Veloc	ity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)		
Stock		Advanced Polymer. Integrated Pistol Grip.				
Length		1135mm (44.7")				
Barrel Length		370mm (14.5")				
Weight		2.75kg (6lbs)				
Fiber Optic	Rear Sight	0.9mm (.035") green				
Sights Diameters	Front Sight	1.5mm (.060") red				

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.









* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





640 fps**POWER!** with Lead Pellets

Model		Alpha			
Caliber		4.5mm / .177cal	5.5mm /.22cal		
Max. Muzzle Veloc	;ity (*)	195m/s (640 fps)	170 m/s (550fps)		
Stock		Advanced Polymer.			
Length		1057mm (41.6")			
Barrel Length		370mm (14.5")			
Weight		2.3kg (5lbs)			
Fiber Optic	Rear Sight	0.9mm (.035") green			
Sights Diameters	Front Sight	1.5mm (.060") red			

 * Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.



Model		MOD 33	MOD 35S	
Caliber		4.5mm / .177 cal	4.5mm / .177 cal	
Max. Muzzle Velocity (*)		200m/s (650 fps)	200m/s (650 fps)	
Stock		Advanced Polymer	Wooden	
Length	Length		1070mm (42.1")	
Barrel Length	Barrel Length		450mm (17.7")	
Weight		3kg (6.6 lbs)	3kg (6.6 lbs)	
Fiber Optic	Rear Sight	0.9mm (.035") green	0.9mm (.035") green	
Sights Diameters	Front Sight	1.5mm (.060") red	1.5mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





SUPER CHARGER QE

3

QLietEnergy Version QE fully shrouded barrel and Integrated Sound Moderator -Approximately 50% Quieter.

XRS - RECOIL REDUCTION SYSTEM

3

QUATTRO

Equipped with Hatsan's "XRS-Recoil Reduction System" for a noticeably smooth shot. Recoil is absorbed during the shot by the design of the sliding action. This makes for a more accurate and comfortable shooting experience.



H۲





Mod25 SuperCharger air pistol is designed for high power. It can shoot 700fps. in 177cal (4.5mm) and 600fps in .22cal (5.5mm) all rated with lead pellets. You have the power of an air rifle from the Mod25 Supercharger air pistol. It's well balanced design fits perfect in your hands. The grip is sporting style and ergonomically shaped. Left hand version grip is available upon request. Muzzle cap fitted muzzle is 1/2" UNF threaded for silencer or muzzle break mounts. The included aluminum cocking aid assists in cocking and also provides a more stylish look.

Aluminum cocking aid.

Model		Mod 25 Sup	Mod 25 SuperCharger SuperCharg			
Caliber		4.5 mm / .177 cal	5.5 mm / . 22 cal	4.5mm / .177cal	5.5mm /.22cal	
Max. Muzzle Velocity (*)		215 m/s (700 fps)	180 m/s (600 fps)	215 m/s (700 fps)	180 m/s (600 fps)	
Stock		Advanced	Polymer	Advanced Polymer Grip		
Length		508 mm (20")		475 mm (18.7")		
Barrel Length		230 mm (9.05")		184 mm (7.2")		
Weight		1.7 kg (3.9 lbs)		1.6kg (3.5lbs)		
Fiber Optic	Rear Sight	0.9 mm (.035") green		0.9mm (.035") green		
Sights Diameters	Front Sight	1.5 mm (.060") red		1.5mm(.060") red		

Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity

figures are obtained when there is no energy restriction on the air rifle.



mouor			Jupontuot	incu zo cuportuot qz			
Caliber		4.5 mm / .177 cal	5.5 mm / . 22 cal	4.5mm / .177cal 5.5mm / .22cal			
Max. Muzzle Velo	city (*)	215 m/s (700 fps)	180 m/s (600 fps)	215 m/s (700 fps)	180 m/s (600 fps)		
Stock		Tactical Telescopic Stock	/ Advanced Polymer Grip	Tactical Telescopic Stock / Adjustable Comb / Advanced Polymer Grip			
Butt Shortened		670mm	(26.3")	837mm (32.9")			
Length	Butt Extended	770mm	(30.3")	937mm (36.9")			
Barrel Length		230mm	(9.05")	230mm (9")			
Weight		2.5kg ((5.5lbs)	2.6kg (5.7lbs)			
Fiber Optic Rear Sight		0.9 mm (.035") green		0.9mm (.035") green			
Sights Diameters	Front Sight	1.5 mm (.060") red	1.5mm (.060") red			
* About marine must le valorite fourse man differ despeding en the pellet unicht 8 chang							

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape. * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.






MOD 25



Model	MOD 25			
Caliber	4.5mm / .177cal	5.5mm / .22cal		
Max. Muzzle Velocity (*)	150m/s (500fps)	120m/s (400fps)		
Stock	Advanced Polymer	Advanced Polymer		
Length	370mm (14.5")	370mm (14.5")		
Barrel Length	165mm (6.5")	165mm (6.5")		
Weight	1.24kg (2.7 lbs)	1.24kg (2.7 lbs)		

Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

HATSAN.COM.TR





96





OPTIMA SCOPES



2.5-10x50E SFT Scope

Red illuminated reticle, aluminum frame scope. Comes with scope mounts.



PTIMA

3-12x44AOE Scope Red illuminated reticle, aluminum frame scope. Comes with scope mounts.



3-9x32 Scope Aluminum frame scope. Comes with scope mounts.



3-7x20 Scope

Aluminum frame scope. Comes with scope mounts.





Aluminum frame scope. Comes with scope mounts.



1x40 Red-Dot Sight Aluminum frame red dot sight. Comes with integrated mounts.

Model	Magnification	Objective Diameter	Tube Diameter	Exit Pupil	Eye Relief	Length	Weight
Optima 2.5-10x50E SFT	2.5x-10x	50mm	30mm	5-20mm	86-90mm	322mm	805grams
Optima 1x40 Red Dot Sight	1X	40mm	47mm	40mm	unlimited	9.5cm	190grams
Optima 3-12x44AOE Scope	3X-12X	44mm	25.4mm	14.6 - 3.67mm	82-87mm	33cm	500grams
Optima 3-9x32 Scope	3-9x32	32mm	25.4mm	3.56- 10.67mm	70-85mm	29.5cm	395grams
Optima 3-7x20 Scope	3-7x20	20mm	19mm	6.7- 2.9mm	75mm	29.5cm	235grams
Optima 4x20 Scope	4x20	20mm	19mm	5mm	75mm	29.5cm	207grams



ACCESSORIES



OPTIMA PROTECTOR SCOPE MOUNT

- Eliminates almost all recoil force on the rifle scopes and hence provides repeated accuracy.
- Suitable with 1" (25.4mm) tube diameter rifles scopes.
- . Fits 11mm dovetail. 22mm picatinny rail version is available.
- . 4 screws per ring secure optics and $\frac{3}{3}$ screws fasten the base of the mount. Includes hex wrench.
- Vertical scope stop pin.
- Dimensions (L x H x W): 120 x 50 x 40mm. •
- Weight: 205 grams.
- . Material: Aluminum.





OPTIMA LONG RANGE SCOPE MOUNT

- Elevation and angle adjustable rings provides more setting needed for lona ranae accuracy.
- 0.16" (4.0mm) elevation adjustable and +/- 1.5 degrees angle adjustable.
- Suitable with 30mm tube diameter rifles scopes.
- Fits 22mm picatinny rails. 11mm dovetail version is available.
- Weight (of 2 rings) : 126grams.
- Material: Aluminum.



AIR RIFLE PELLET CATCHER



- · Designed to use with Hatsan Air Rifles. Special design which traps the pellets and lever lets them out...
- Superb-all-steel construction. Galvanized finish assuring durability and total protection against corrosion.
- Comes in its box with 20 pieces Hatsan targets.
- Suitable for shooting with all Hatsan air guns with velocities even up to 1250 fps (375 m/s).
- Intended for use with lead air-gun pellets. Steel BBs should never be used with pellet catchers because of danger of ricochets.



Special design air rifle bag fitting all Hatsan air rifles. Made of quality and waterproof material and can carry your air rifle with scope mounted.



AIR PISTOL PELLET TCHER



Designed to use with Hatsan Air Pistol.




Hatsan Target #1 for short distance shots

HATSAN TARGETS

Designed to use with Hatsan pellet catchers. Worldwide considered shooting target dimensions. Supplied in 100 pieces , packages: 50pcs target #1 & 50pcs target #2



Hatsan Target #2 for long distance shots

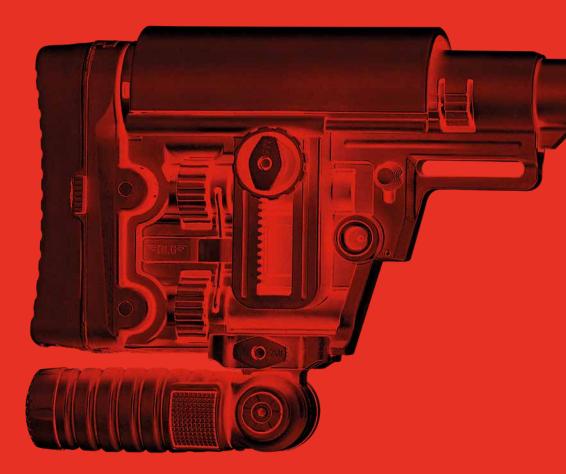

HATSAN **ARMS COMPANY**

Factory: Kemalpasa O.S.B. Mahallesi, Ansizca Sanayi Sitesi No: 303, Kemalpasa, 35730, Izmir - TURKEY Office: Kemalpasa O.S.B. Mahallesi, Izmir - Ankara Karayolu No: 365, Ic Kapi No: 1, Kemalpasa, 35730, Izmir - TURKEY Tel: +90 (232) 878 91 00 Fax: +90 (232) 878 91 02 - 878 97 23 Tel: +90 (232) 878 91 00 Fax: +90 (232) 878 91 02 - 878 97 23 info@hatsan.com.tr

/hatsanarms
/hatsan
/hatsanarms
/hatsanarms
/hatsanarms
/hatsanarms

